


numatics®

F Series

Non-Rotating NFPA Interchangeable Cylinder Line

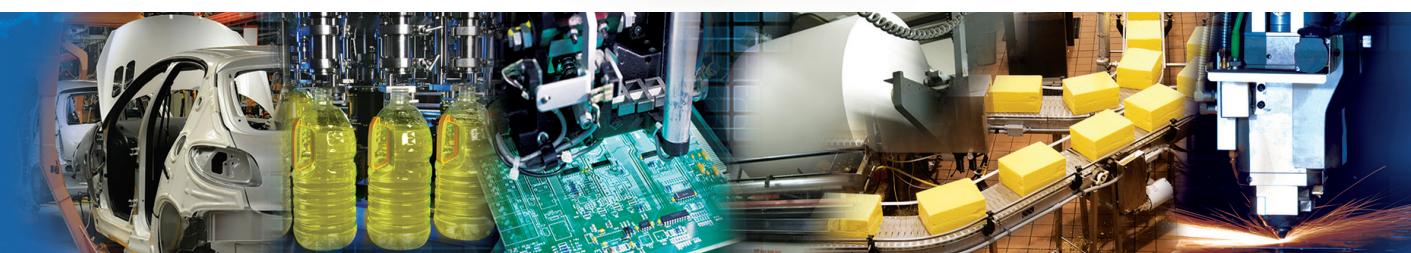

www.numatics.com


EMERSON
Industrial Automation

Table of Contents

F Series

Features and Benefits	3
Standard Mounts	4
How to Order	5
Dimensions	6-11
Basic No-Mount	6
Tooling Plate	6
Flange Mounts	7
Clevis Mounts	8
Eye Mounts	9
Side Lug Mount	10
Bottom Tap Mount	10
Extended Tie Rod Mount	11
Double Rod End	11
F Series Case Loads	12
F Series Switch Information	13
Sensing Part Number	14-16
Quick Disconnect Cable	17
Wiring Diagram	18
How to Order - F Series Piston Rod Assembly	19
How to Order - F Series Repair Kit	20
How to Order - F Series Seal Kit	20
Piston Rod Assembly Kit Removal/Installation Instructions	21
Repair and Seal Kit Removal/Installation Instructions	22
Diagrams	23
Seal Installation Guide	24

The **F Series** is a Non-Rotating NFPA Interchangeable pneumatic cylinder line that provides the solution to specific applications where piston rotation is not acceptable. Our innovative dual rod design provides precision positioning and linear movement. This makes the F Series ideal for a multitude of high-tech applications.

Tube

The **tube** is hard coat anodized. The hard coating is an electro-chemical process which produces a very dense surface of aluminum oxide. This surface has extreme hardness (60 RC.), excellent wear and corrosion resistance, and a low coefficient of friction. Additionally, profile tubing is standard on 1-1/2" through 2-1/2" bore sizes (3-1/4" and 4" bores are the tie rod construction).

End Caps

The **end caps** are accurately machined from (6061-T6) solid aluminum bar stock. They are anodized for corrosion resistance. Additionally, a recess on the piston-mating surface (at both ends) enables the air to work on a larger piston area for effortless breakaway.

Rod Bushing

The F Series includes a graphite filled, cast iron **rod bushing** that is extra long in length. Graphite filling offers the best bearing surface when using a hard chrome plated piston rod. Cast iron provides maximum resistance against wear. The added length adds superior alignment and support of the piston rod as well as provides maximum load bearing support.

Rod Seal and Wiper

The unique **rod seal and wiper** combination is made with carboxilated nitrile with PTFE compound and is self-lubricating and durable. The rounded lip design ensures proper sealing and long life.

Piston Rod

High strength steel (100,000 psi minimum yield) **piston rod** has a ground, polished, and chrome plated surface. This surface provides maximum life for both the rod bushing and the seals.

Retaining Plate

The steel **retaining plate** has dual functions. It retains the bushing as well as inhibits rod rotation. Precise tolerances on both the bushing and the retaining plate allows for an exact fit which prevents rod rotation. By simply removing the four countersunk screws that maintain exact alignment, the orientation of the piston rod and tooling plate can be rotated 90° without cylinder disassembly.

Tooling Plate

The **tooling plate** is machined from solid steel. The tooling plate is reversible, offering both a flush or concentric mount.

Piston Seal

The **piston seal** is a carboxilated nitrile with PTFE compound for self-lubricating. The "T" seal with back-up ring construction prevents rolling and seals at all pressures.

Wear Band

The **wear band** is a stable, lubricating strip located on the piston. We separated the load bearing points by locating the wear band at the rear of the piston. This maximizes column strength at full extension.

Piston

The solid aluminum alloy **piston** is strong and durable.



Cushion Seal

The floating **cushion seal** design enables rapid stroke reversal by providing instantaneous full flow to the piston. Each cushion has a flush, retained adjustment needle.

Tube End Seal

The **tube end seals** are compression type and reusable.

Ports

Our enhanced **port** design enables the cylinder to work more efficiently. Through the use of precise machining depths and tool shape, we are able to smooth the flow path into and out of the cylinder.


Standard Specifications:

- Meets NFPA specifications
- Bore sizes from 1-1/2" through 4"
- Piston rod diameters from 5/16" to 3/4"
- Maximum pressure rating is 250 psi air
- Standard temperature -10°F to 165°F (-23°C to 74°C)
- All aluminum construction, except retaining plate and tooling plate (steel)
- NPTF ports
- Flexible port and cushion locations


Standard F Series Mounts

Centerline Mounts


X0 Mount
Basic No Mount




X2 Mount
Extended Tie Rods – Cap End




F1 Mount
Head Rectangular Flange



F2 Mount
Cap Rectangular Flange




DA Mount
Double Rod End




Pivot Mounts


P1 Mount
Fixed Clevis




P2 Mount
Detachable Clevis



P3 Mount
Fixed Eye




P4 Mount
Detachable Eye




Foot Mounts

S2 Mount
Side Lugs



S4 Mount
Bottom Tapped



*F Series are profile tube from 1 1/2" - 3 1/4" bore. Only 4" bore is round tube and tie rod.

How to Order

F1 F K - 00 A 1 P - C AA 0

Mounting

F1 = Front Flange
 F2 = Rear Flange
 P1 = Fixed Clevis
 P2 = Detachable Clevis
 P3 = Fixed Eye
 P4 = Detachable Eye
 S2 = Side Lug Mount
 S4 = Bottom Tapped
 X0 = Basic No Mount
 X2 = Cap Extended Tie Rods

Type

F = F Series Non-Rotating
 NFPA Interchangeable

Bore

K = 1-1/2"
 L = 2"
 M = 2-1/2"
 P = 3-1/4"
 R = 4"

Full Inch of Stroke

00 = 0" Stroke
 01 = 1" Stroke
 02 = 2" Stroke
 03 = 3" Stroke
 20 = 20" Stroke

Fractional Inches of Stroke

A = 0"	I = 1/2"
B = 1/16"	J = 9/16"
C = 1/8"	K = 5/8"
D = 3/16"	L = 11/16"
E = 1/4"	M = 3/4"
F = 5/16"	N = 13/16"
G = 3/8"	O = 7/8"
H = 7/16"	P = 15/16"

Magnet

0 = No Magnet
 2 = Magnet

Options

AA = No Options
 BA** = Bumpers Both Ends (3-1/4" and 4" only)
 BH** = Bumper Head only (3-1/4" and 4" only)
 BC** = Bumper Cap only
 KA* = Stroke Adjuster
 DA = Double Rod End
 NA = Nickel Plated Cylinder
 Stainless Steel Rod and Tie rods
 RA* = Save Air Stroke Adjuster
 SA = Stainless Steel Piston Rod
 SS = Stainless Piston Rod and Tie Rod
 ST = Stainless Tie Rods
 1A* = Rod Extension
 4A* = Stop Tube
 * Specify length.
 **Bumpers add 0.062" to OAL (per bumper).

Cushions

Position	1	2	3	4
No Cushion	A	A	A	A
Head and Cap	B	C	D	E
Head Only	F	G	H	J
Cap Only	K	L	M	N


Ports

Position	1/8"	1/4"	3/8"	1/2"	3/4"
1	B	C	D	E	F
2	H	I	J	K	L
3	N	O	P	Q	R
4	T	U	V	W	X

Rod End Codes

1 = Rod Vertical, Style # 1 on opposite end if the DA option is used
 2 = Rod Vertical, Style # 2 on opposite end if the DA option is used
 3 = Rod Vertical, Style # 3 on opposite end if the DA option is used
 6 = Rod Horizontal, Style # 1 on opposite end if the DA option is used
 7 = Rod Horizontal, Style # 2 on opposite end if the DA option is used
 8 = Rod Horizontal, Style # 3 on opposite end if the DA option is used


Port and Cushion Orientation




* Ports Normally In Position 1

** Cushions Normally In Position 2

Cylinder Rod Orientation




Standard Rod Orientation Vertical



Optional Rod Orientation Horizontal

Dimensions: Inches

Basic No Mount Cylinder

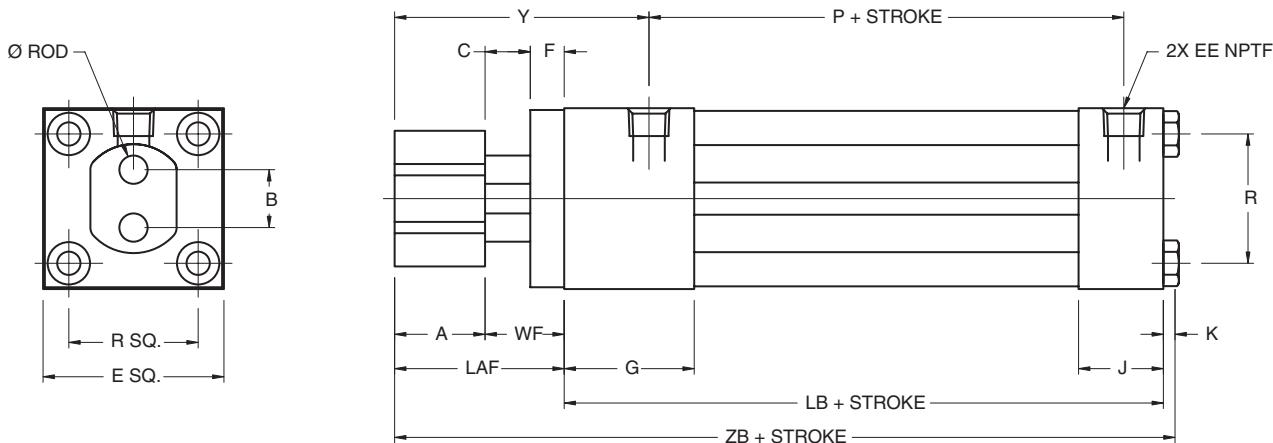


NOTE: Tooling plate removed for clarity.

NFPA Mount Code MX0

Bore	Rod	A	B	C	E	F	G	J	K	P	R	Y	EE	LB	WF	ZB	LAF
1-1/2"	0.313	1.000	0.640	0.500	2.000	0.375	1.500	1.000	0.250	2.250	1.430	2.813	3/8	3.625	0.875	5.750	1.875
2"	0.500	1.000	0.844	0.500	2.500	0.375	1.500	1.000	0.313	2.250	1.840	2.813	3/8	3.625	0.875	5.813	1.875
2-1/2"	0.625	1.250	1.219	0.500	3.000	0.375	1.500	1.000	0.313	2.375	2.190	3.063	3/8	3.750	.875	6.188	2.125
3-1/4"	0.750	1.250	1.219	0.500	3.750	0.625	1.750	1.250	0.375	2.625	2.760	3.438	3/8	4.250	1.125	7.000	2.375
4"	0.750	1.250	1.907	0.500	4.500	0.625	1.750	1.250	0.375	2.625	3.320	3.438	1/2	4.250	1.125	7.000	2.375



Tooling Plate

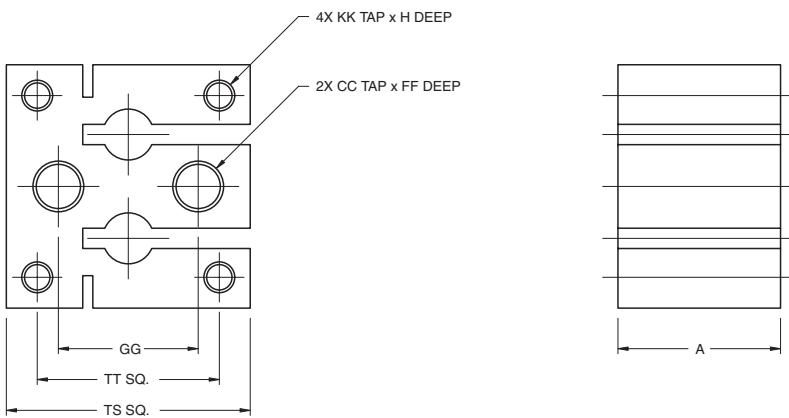



Bore	CC	FF	GG	KK	H	TS	TT
1-1/2"	5/16-18	0.375	0.860	#10-32	0.625	1.500	1.120
2"	5/16-18	0.375	1.180	1/4-28	0.750	2.000	1.430
2-1/2"	3/8-16	0.625	1.500	5/16-24	0.875	2.500	1.840
3-1/4"	1/2-13	0.625	1.970	3/8-24	0.875	3.250	1.790
4"	1/2-13	0.625	2.760	3/8-24	0.875	4.000	3.440

Dimensions: Inches (mm)

Flange Mounts

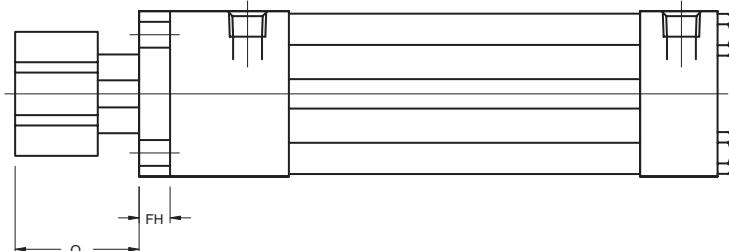

Mount Code NFPA MF1

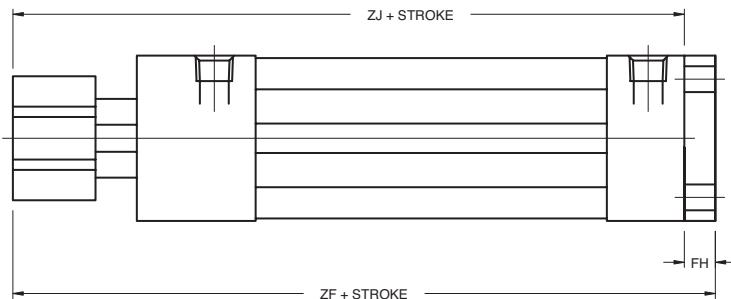


Mount Code NFPA MF2


Bore	FB	FH	Q	R	TF	UF	ZF	
1-1/2"	1/4	0.375	1.500	1.430	2.750	3.375	5.875	5.500
2"	5/16	0.375	1.500	1.840	3.375	4.125	5.875	5.500
2-1/2"	5/16	0.375	1.750	2.190	3.875	4.625	6.250	5.875
3-1/4"	3/8	0.625	1.750	2.760	4.688	5.500	7.250	6.625
4"	3/8	0.625	1.750	3.320	5.438	6.250	7.250	6.625

Dimensions: Inches

Clevis Mounts

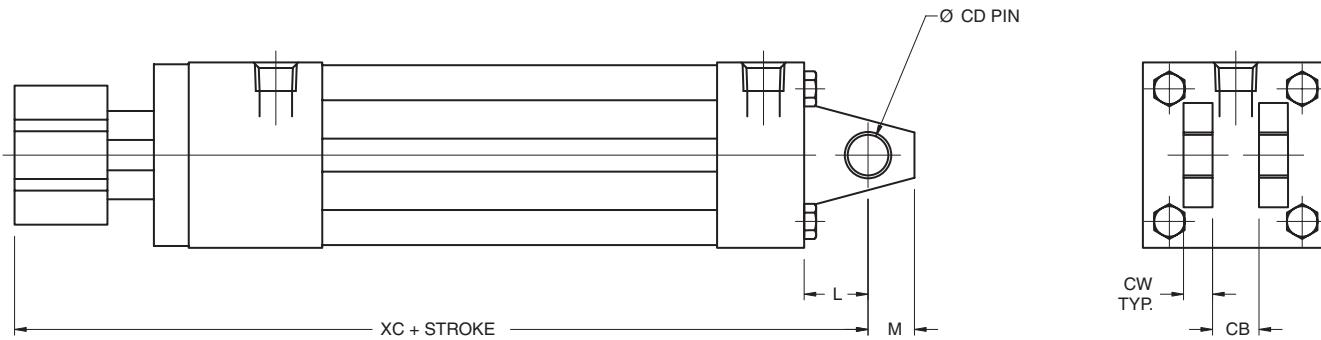

NFPA Mount Code MP1


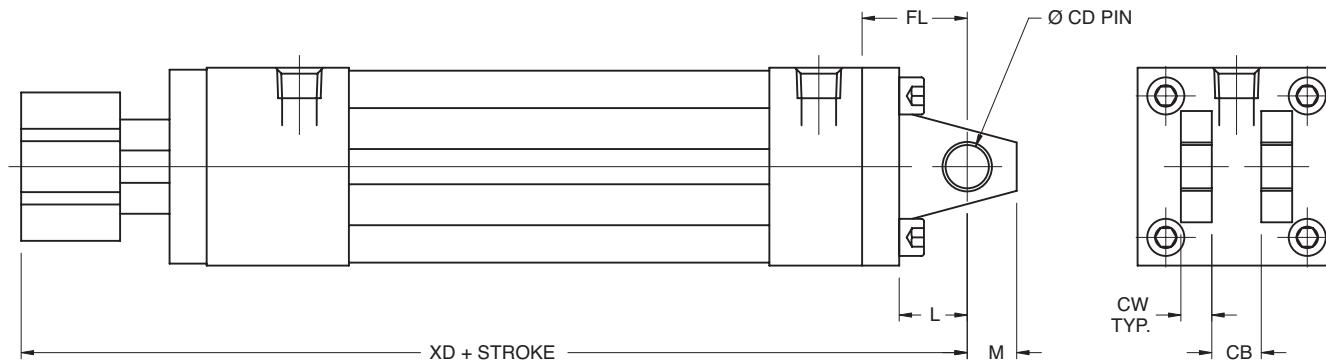


NFPA Mount Code MP2

Bore	L	M	CB	CD	CW	FL	XC	XD
1-1/2"	0.750	0.500	0.750	0.500	0.500	1.125	6.250	6.625
2"	0.750	0.500	0.750	0.500	0.500	1.125	6.250	6.625
2-1/2"	0.750	0.500	0.750	0.500	0.500	1.125	6.250	7.000
3-1/4"	1.250	0.750	1.250	0.750	0.625	1.875	7.875	8.500
4"	1.250	0.750	1.250	0.750	0.625	1.875	7.875	8.500

Dimensions: Inches

Eye Mounts

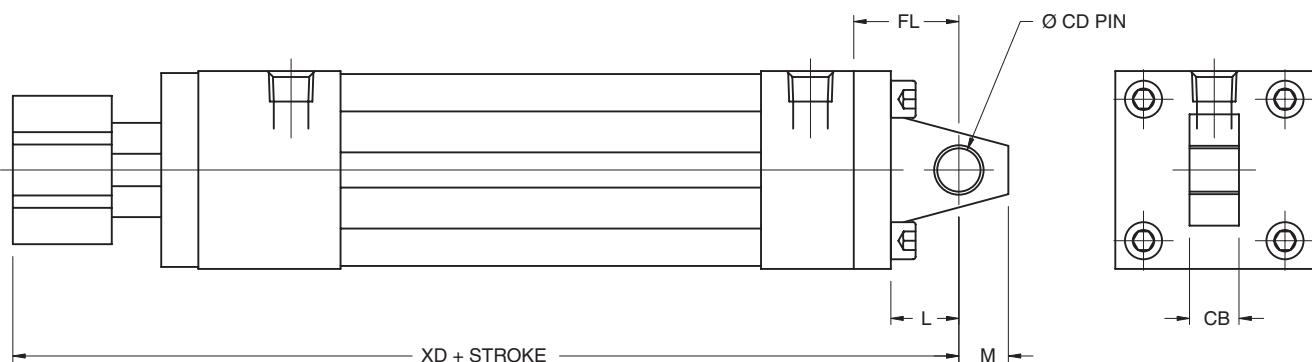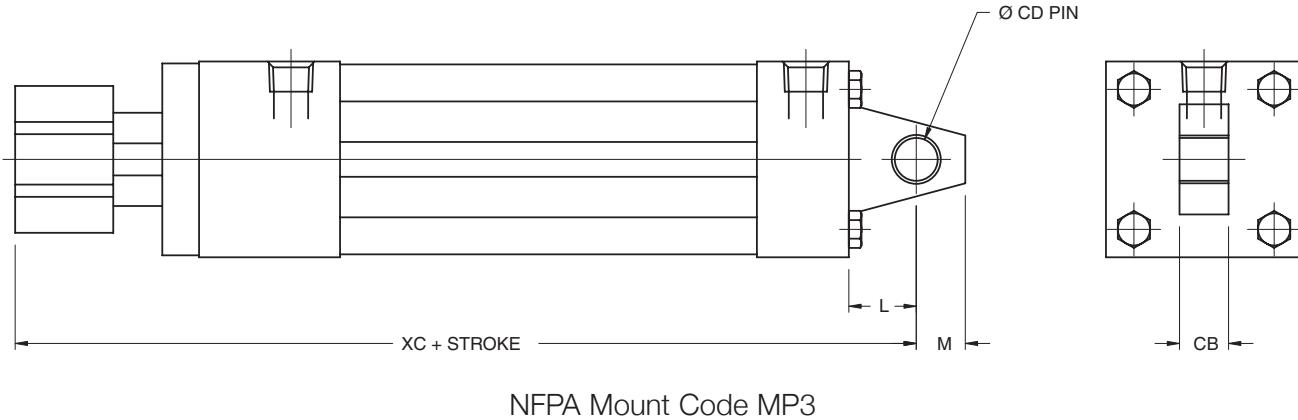


NFPA Mount Code MP4

Bore	L	M	CB	CD	FL	XC	XD
1-1/2"	0.750	0.500	0.750	0.500	1.125	6.250	6.625
2"	0.750	0.500	0.750	0.500	1.125	6.250	6.625
2-1/2"	0.750	0.500	0.750	0.500	1.125	6.250	7.000
3-1/4"	1.250	0.750	1.250	0.750	1.875	7.875	8.500
4"	1.250	0.750	1.250	0.750	1.875	7.875	8.500

Dimensions: Inches


Side Lug Mount

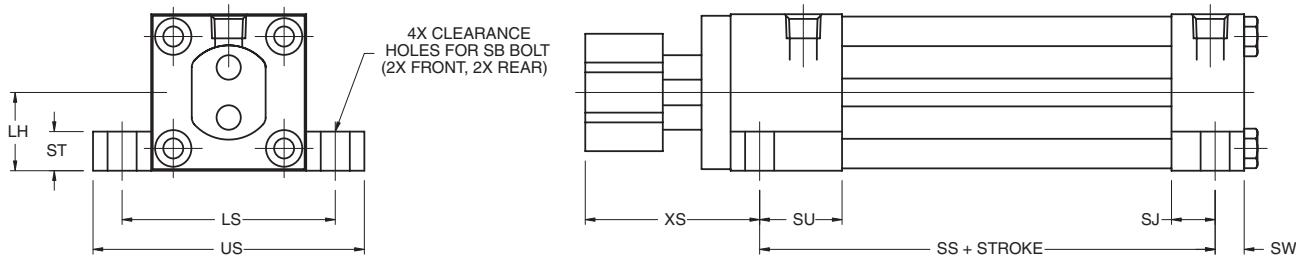

NFPA Mount Code MS2

Bore	LH	LS	SB	SJ	SS	ST	SU	SW	US	XS
1-1/2"	1.000	2.750	3/8	0.625	2.875	0.500	1.125	0.375	3.500	2.250
2"	1.250	3.250	3/8	0.625	2.875	0.500	1.125	0.375	4.000	2.250
2-1/2"	1.500	3.750	3/8	0.625	3.000	0.500	1.125	0.375	4.500	2.500
3-1/4"	1.875	4.750	1/2	0.750	3.250	0.750	1.250	0.500	5.750	2.875
4"	2.250	5.500	1/2	0.750	3.250	0.750	1.250	0.500	6.500	2.875

Bottom Tap Mount

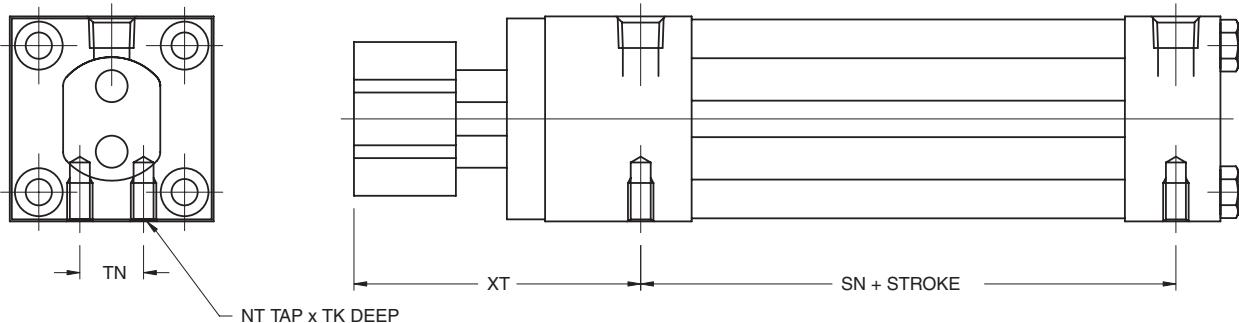


NFPA Mount Code MS4

Bore	NT	TK	TN	SN	XT
1-1/2"	1/4-20	0.250	0.625	2.250	2.813
2"	5/16-18	0.313	0.875	2.250	2.813
2-1/2"	3/8-16	0.375	1.250	2.375	3.063
3-1/4"	1/2-13	0.500	1.500	2.625	3.438
4"	1/2-13	0.500	2.063	2.625	3.438

Dimensions: Inches


Extended Tie Rod Mount

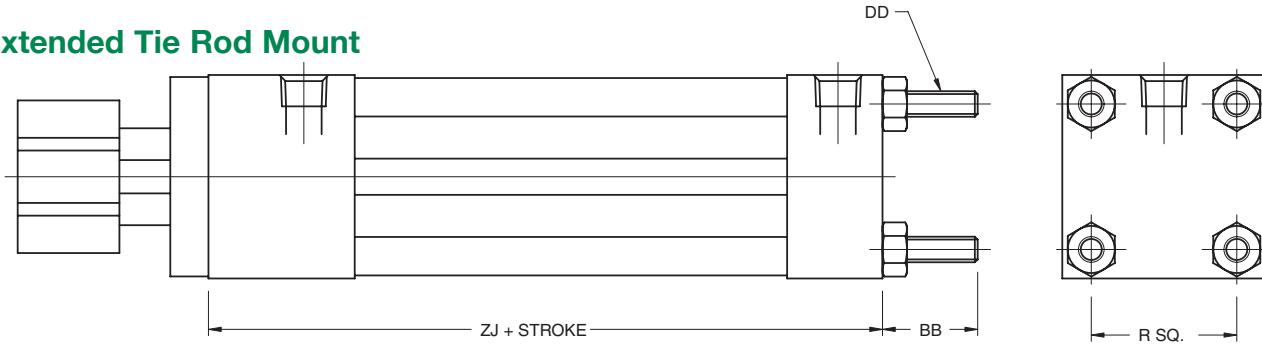

NFPA Mount Code MX2

Bore	BB	DD	R	ZJ
1-1/2"	1.000	1/4-28	1.430	5.500
2"	1.125	5/16-24	1.840	5.500
2-1/2"	1.125	5/16-24	2.190	5.875
3-1/4"	1.375	3/8-24	2.760	6.625
4"	1.375	3/8-24	3.320	6.625

Double Rod End

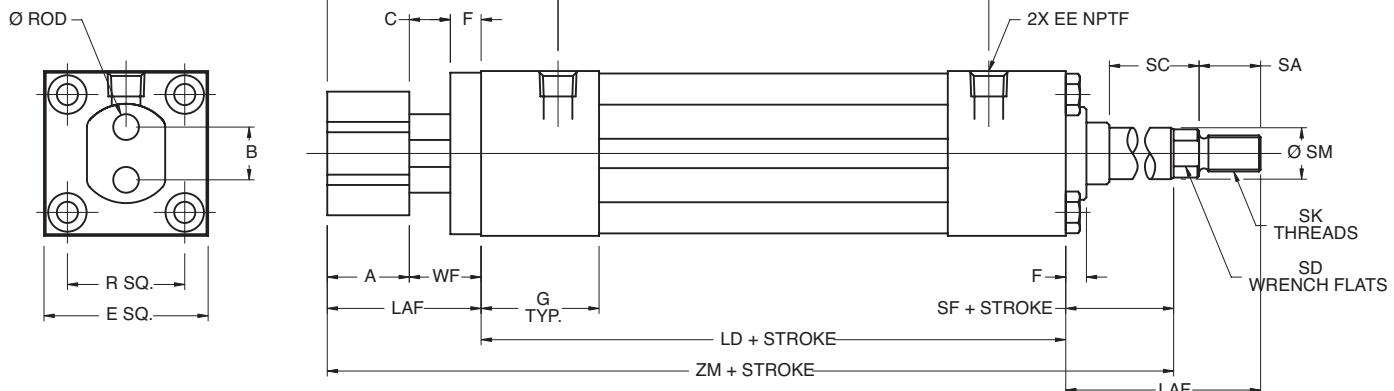

Order as "DA" Option

Bore	Rod	A	B	C	E	EE	F	G	LD	LAF	P
1-1/2"	0.313	1.000	0.640	0.500	2.000	3/8	0.375	1.500	4.125	1.875	2.250
2"	0.500	1.000	0.844	0.500	2.500	3/8	0.375	1.500	4.125	1.875	2.250
2-1/2"	0.625	1.250	1.219	0.500	3.000	3/8	0.375	1.500	4.250	2.125	2.375
3-1/4"	0.750	1.250	1.129	0.500	3.750	3/8	0.625	1.750	4.750	2.375	2.625
4"	0.750	1.250	1.907	0.500	4.500	1/2	0.625	1.750	4.750	2.375	2.625

Bore	R	SA	SC	SD	SF	SK	SM	WF	Y	ZM
1-1/2"	1.430	0.750	0.375	0.500	1.000	7/16-20	0.625	0.875	2.813	7.000
2"	1.840	0.750	0.375	0.500	1.000	7/16-20	0.625	0.875	2.813	7.000
2-1/2"	2.190	0.750	0.375	0.500	1.000	7/16-20	0.625	0.875	3.063	7.375
3-1/4"	2.760	1.125	0.500	0.813	1.375	3/4-16	1.000	1.125	3.438	8.500
4"	3.320	1.125	0.500	0.813	1.375	3/4-16	1.000	1.125	3.438	8.500


Note: For switch ordering information see the Actuator Accessories section.

F Series Case Loads


Case Load Instructions:

- 1) Choose the appropriate case for your application.
(See drawings for Case 1, 2, and 3)
- 2) On the left side of the chart, locate the sideload or torque that your application will experience.
- 3) On the bottom scale, locate the maximum stroke for the application.
- 4) Follow the lines up to determine the minimum cylinder your application will require.


Case 2

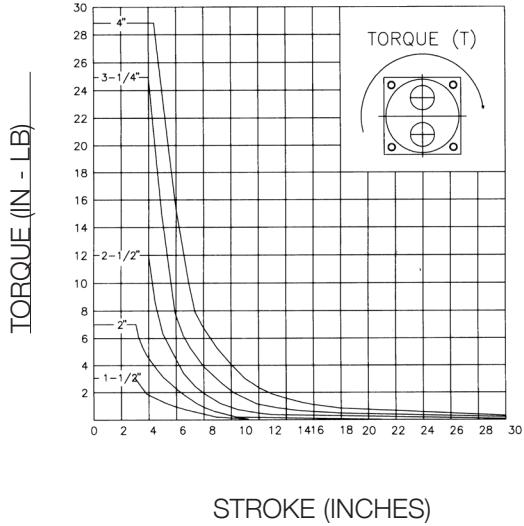

Case 1

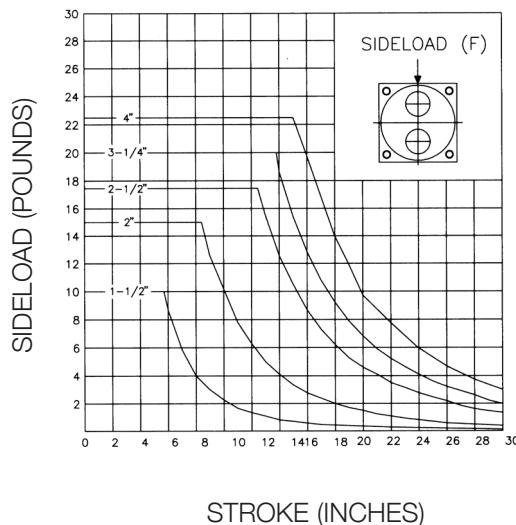

Case 3

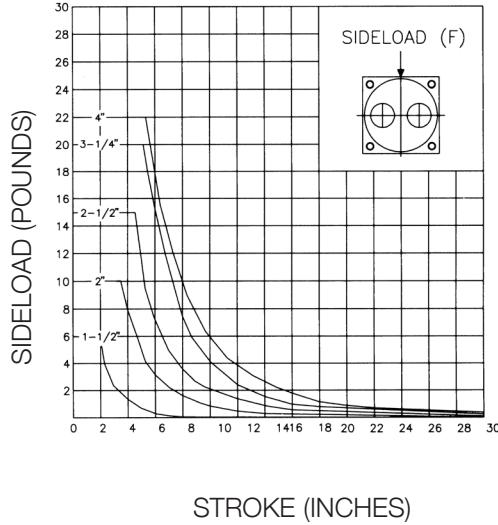


These charts have been developed to aid in bore selection. For strokes/loads exceeding these charts, consult your Numatics distributor.

NOTE:


There is a significant difference between Case 1 and Case 3.

F Series Switch Information**F Series World Switch Reed Switch Part Numbers**

P/N	Switch Style	Electrical Design	Output	Operating Voltage	Current Rating	Switching Power	Voltage Drop	NEMA IP Rating	Temperature Rating
SR6-002	Flying Lead	AC/DC REED	Normally Open	5 -120 VAC/DC	0.025 Amps Max. 0.001 Amps Min.	3 Watts Max.	3.5 Volts	NEMA 6	-25° to +75° C
SR6-004	Flying Lead	AC/DC REED	Normally Open	5 -120 VAC/DC	0.5 Amps Max. 0.005 Amps Min.	10 Watts Max.	3.0 Volts	NEMA 6	-25° to +75° C
SR6-022	M8 Connector	AC/DC REED	Normally Open	5-50 VAC 5-60 VDC	0.025 Amps Max. 0.001 Amps Min.	12 Watts Max.	0.5 Volts	NEMA 6	-25° to +75° C
SR6-024	M8 Connector	AC/DC REED	Normally Open	5-50 VAC 5-60 VDC	0.5 Amps Max. 0.005 Amps Min.	10 Watts Max.	3.0 Volts	NEMA 6	-25° to +75° C

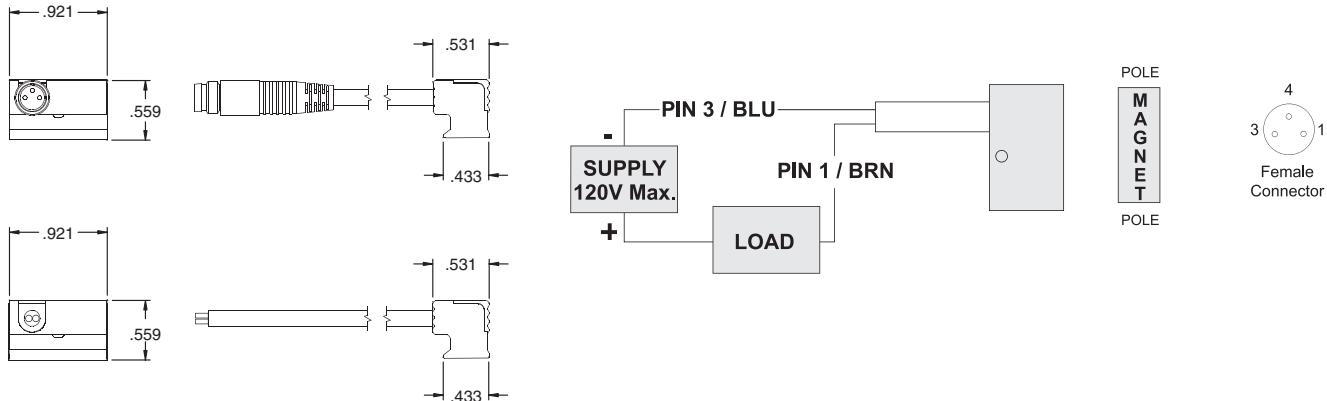Reed Switch - Normally Open Type SR6**NFPA Interchangeable Cylinders****F Series (Tie Rod)**

Bore	Bracket P/N
1 1/2"	N99-1181
2"	N99-1182
2 1/2"	N99-1182
3 1/4"	N99-1183
4"	N99-1183
5"	N99-1184
6"	N99-1184
8"	N99-1184
10"	N99-1191
12"	N99-1191
14"	N99-1200




Sensor Description	Standard Cord Set	Quick Disconnect
Reed Switch	REED-FL2-00	REED-QDS-M8U
Hall PNP	PNP-FL2-00-U	PNP-QDS-M8-U
Hall NPN	NPN-FL2-00-U	NPN-QDS-M8-U

See page 13, 14, & 15 for sensor specifications

F Series (Profile Tube)

Bore	Bracket P/N
1 1/2"	N99-1185
2"	N99-1185
2 1/2"	N99-1185




Sensor Description	Standard Cord Set	Quick Disconnect
Reed Switch	REED-FL2-00	REED-QDS-M8U
Hall PNP	PNP-FL2-00-U	PNP-QDS-M8-U
Hall NPN	NPN-FL2-00-U	NPN-QDS-M8-U


See page 13, 14, & 15 for sensor specifications

Sensing Part Numbers

PNP-FL2-00-U

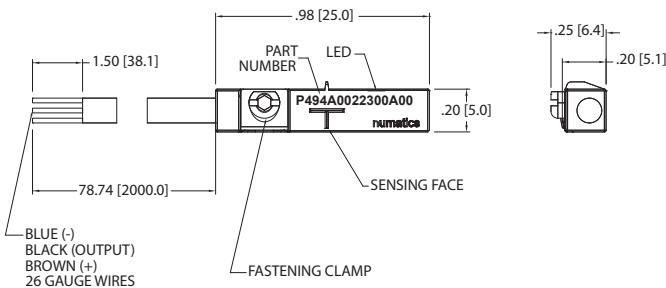

PNP-QDS-M8-U

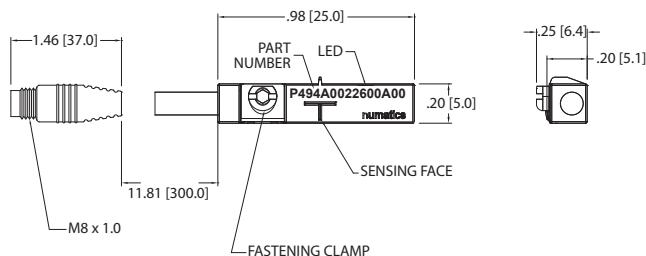


ELECTRICAL DESIGN	DC PNP
OUTPUT	Normally Open
OPERATING VOLTAGE	10-30 VDC
CURRENT RATING	100 mA
SHORT-CIRCUIT PROTECTION	Yes
OVERLOAD PROTECTION	Yes
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 2.5 V
CURRENT CONSUMPTION	< 12 mA
REPEATABILITY	< .2mm
POWER-ON DELAY TIME	< 30 ms
SWITCH FREQUENCY	> 3000 Hz
AMBIENT TEMPERATURE	-25°C to 85°C
PROTECTION	IP 67, III
HYSTERESIS	1.0mm
MAGNETIC SENSITIVITY	2.0 mT
TRAVEL SPEED	> 10 m/s
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	Flying Leads, Pur Cable (2m Long, 3 x26 Gauge Wire)
REMARKS	Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5 cULus - Class 2 Source Required
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	


ELECTRICAL DESIGN	DC PNP
OUTPUT	Normally Open
OPERATING VOLTAGE	10-30 VDC
CURRENT RATING	100 mA
SHORT-CIRCUIT PROTECTION	Yes
OVERLOAD PROTECTION	Yes
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 2.5 V
CURRENT CONSUMPTION	< 12 mA
REPEATABILITY	< .2mm
POWER-ON DELAY TIME	< 30 ms
SWITCH FREQUENCY	> 3000 Hz
AMBIENT TEMPERATURE	-25°C to 85°C
PROTECTION	IP 67, III
HYSTERESIS	1.0mm
MAGNETIC SENSITIVITY	2.0 mT
TRAVEL SPEED	> 10 m/s
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	M8 Connector (Snap Fit) , Pur Cable (.3 m)
REMARKS	Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5 cULus - Class 2 Source Required
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	

Sensing Part Numbers

NPN-FL2-00-U

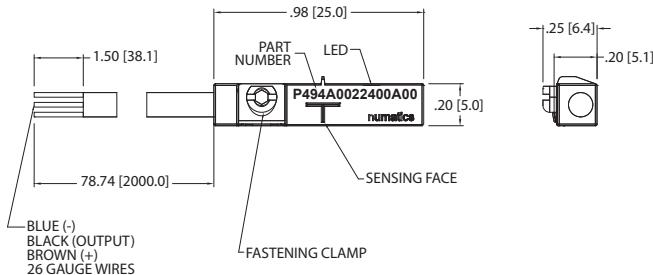

NPN-QDS-M8-U

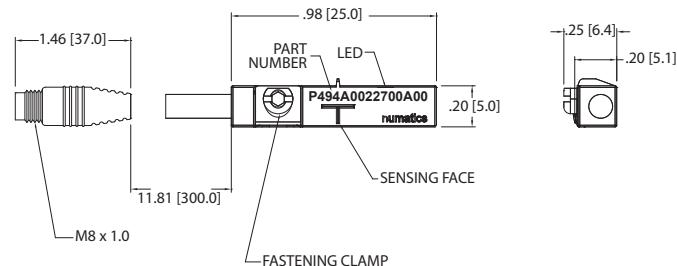

ELECTRICAL DESIGN	DC NPN
OUTPUT	Normally Open
OPERATING VOLTAGE	10-30 VDC
CURRENT RATING	100 mA
SHORT-CIRCUIT PROTECTION	Yes
OVERLOAD PROTECTION	Yes
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 2.5 V
CURRENT CONSUMPTION	< 12 mA
REPEATABILITY	< .2mm
POWER-ON DELAY TIME	< 30 ms
SWITCH FREQUENCY	> 3000 Hz
AMBIENT TEMPERATURE	-25°C to 85°C
PROTECTION	IP 67, III
HYSTERESIS	1.0mm
MAGNETIC SENSITIVITY	2.0 mT
TRAVEL SPEED	> 10 m/s
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	Flying Leads, Pur Cable (2m Long, 3 x26 Gauge Wire)
REMARKS	Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5 cULus - Class 2 Source Required
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	


ELECTRICAL DESIGN	DC NPN
OUTPUT	Normally Open
OPERATING VOLTAGE	10-30 VDC
CURRENT RATING	100 mA
SHORT-CIRCUIT PROTECTION	Yes
OVERLOAD PROTECTION	Yes
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 2.5 V
CURRENT CONSUMPTION	< 12 mA
REPEATABILITY	< .2mm
POWER-ON DELAY TIME	< 30 ms
SWITCH FREQUENCY	> 3000 Hz
AMBIENT TEMPERATURE	-25°C to 85°C
PROTECTION	IP 67, III
HYSTERESIS	1.0mm
MAGNETIC SENSITIVITY	2.0 mT
TRAVEL SPEED	> 10 m/s
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	M8 Connector (Snap Fit) , Pur Cable (.3 m)
REMARKS	Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5 cULus - Class 2 Source Required
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	

*Switches are not designed for wet environments. Please see your distributor for additional information.


Information subject to change without notice. For ordering information or regarding your local sales office visit www.numatics.com.

Sensing Part Numbers

REED-FL2-00

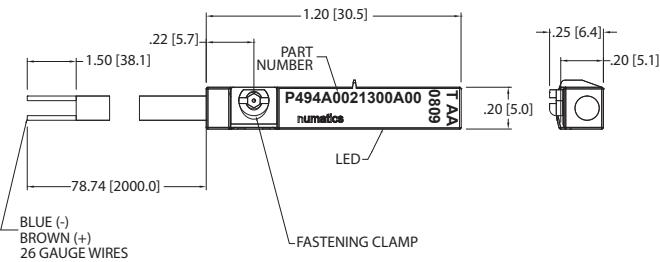

REED-QDS-M8U

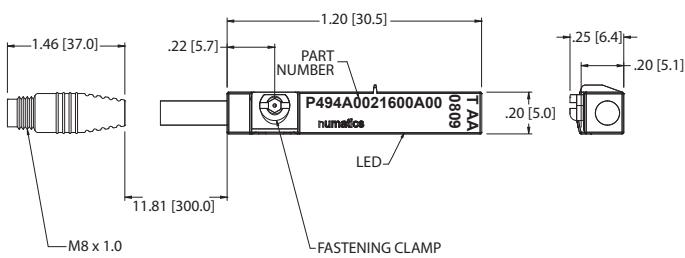


ELECTRICAL DESIGN	AC/DC REED
OUTPUT	Normally Open
OPERATING VOLTAGE	5-120 VAC/DC
CURRENT RATING	100 mA*
SHORT-CIRCUIT PROTECTION	No
OVERLOAD PROTECTION	No
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 5 V
REPEATABILITY	± .2mm
MAKETIME INCLUDING BOUNCE	< .6 ms
BREAKTIME	< .1 ms
SWITCHING POWER (MAX)	5 W
SWITCH FREQUENCY	1000 Hz
AMBIENT TEMPERATURE	-25°C to 70°C
PROTECTION	IP 67, II
HYSTERESIS	.9mm
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	Flying Leads, Pur Cable (2m Long, 2 x26 Gauge Wire)
REMARKS	<p>*External Protective Circuit for Inductive Load (Valve, Contactor, Etc..) Necessary. Conforms to 2008 NEC Section 725 III, Class 2 Circuits</p> <p>Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5. No LED Function in case of Polarity in DC Operation</p>
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	 

ELECTRICAL DESIGN	AC/DC REED
OUTPUT	Normally Open
OPERATING VOLTAGE	*5-60 VDC / 5-50 VAC
CURRENT RATING	100 mA
SHORT-CIRCUIT PROTECTION	No
OVERLOAD PROTECTION	No
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 5 V
REPEATABILITY	± .2mm
MAKETIME INCLUDING BOUNCE	< .6 ms
BREAKTIME	< .1 ms
SWITCHING POWER (MAX)	5 W
SWITCH FREQUENCY	1000 Hz
AMBIENT TEMPERATURE	-25°C to 70°C
PROTECTION	IP 67, II
HYSTERESIS	.9mm
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	M8 Connector (Snap Fit), Pur Cable (.3m)
REMARKS	<p>*External Protective Circuit for Inductive Load (Valve, Contactor, Etc..) Necessary. Conforms to 2008 NEC Section 725 III, Class 2 Circuits</p> <p>M8 Connector voltage limited to 5-60 vdc / 5-50 vac to conform with 2008 IEC 61076-2-104</p> <p>Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5. No LED Function in case of Polarity in DC Operation</p>
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	 


*Switches are not designed for wet environments. Please see your distributor for additional information.

F Series World Switch Hall Effect Part Numbers

P/N	Switch Style	Electrical Design	Output	Operating Voltage	Current Rating	Switching Power	Voltage Drop	NEMA IP Rating	Temperature Rating
SH6-031	Flying Lead	PNP	Normally Open	6-24 VDC	0.3 Amps Max.	3 Watts Max.	3.5 Volts	NEMA 6	-25° to +75° C
SH6-032	Flying Lead	NPN	Normally Open	6-24 VDC	0.3 Amps Max.	10 Watts Max.	3.0 Volts	NEMA 6	-25° to +75° C
SH6-021	M8 Connector	PNP	Normally Open	6-24 VDC	0.3 Amps Max.	12 Watts Max.	0.5 Volts	NEMA 6	-25° to +75° C
SH6-022	M8 Connector	NPN	Normally Open	6-24 VDC	0.3 Amps Max.	10 Watts Max.	3.0 Volts	NEMA 6	-25° to +75° C

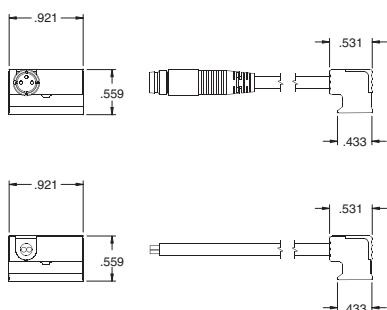


PNP Sourcing



POLE
MAGNET
POLE


NPN Sinking

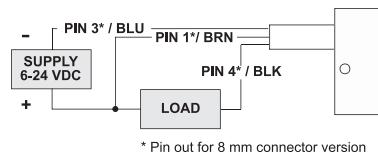

POLE
MAGNET
POLE

F Series 9000 Application Detail**Profile Tube Detail**






1. 9000 Switch
2. Included Dovetail adapter
3. Dove Tail extrusion

**F series 9000 Series Switch**

Cylinders	Bore	Part Number
F series Profile	1 1/2"-2 1/2" Bore	Direct Fit w/included adapter


Series 9000 Type 02, 31 & 32

Wiring Diagrams

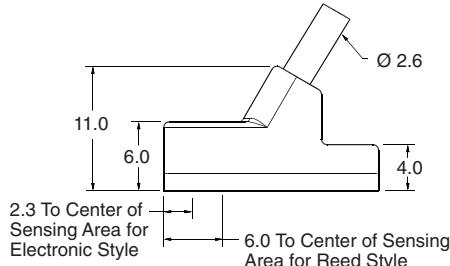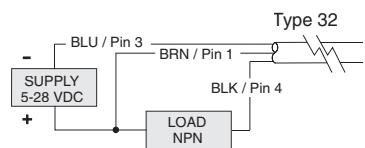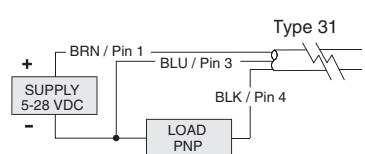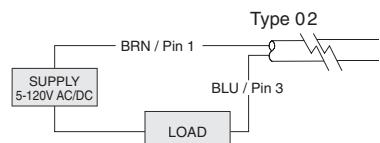

Type Code	Description	Function	Switching Voltage	Switching Current	Switching Power	Switching Speed	Voltage Drop
940-100-002	Reed Switch for PLC's, LED (current limiting)	SPST Normally Open	5-120V AC/DC 50/60 Hz	0.03 Amps max. 0.001 Amps min.	4 Watts max.	0.4 ms operate 0.1 ms release	3.5 Volts @ 5 mA
940-100-031	Electronic for Reed Magnet, LED & Sourcing	PNP Normally Open	5-28 VDC	0.2 Amps max.	4.8 Watts max.	4 µs operate 4 µs release	1.0 Volts max
940-100-032	Electronic for Reed Magnet, LED & Sinking	NPN Normally Open	5-28 VDC	0.2 Amps max.	4.8 Watts max.	4 µs operate 4 µs release	1.0 Volts max


How to Order - F Series Piston Rod Assembly

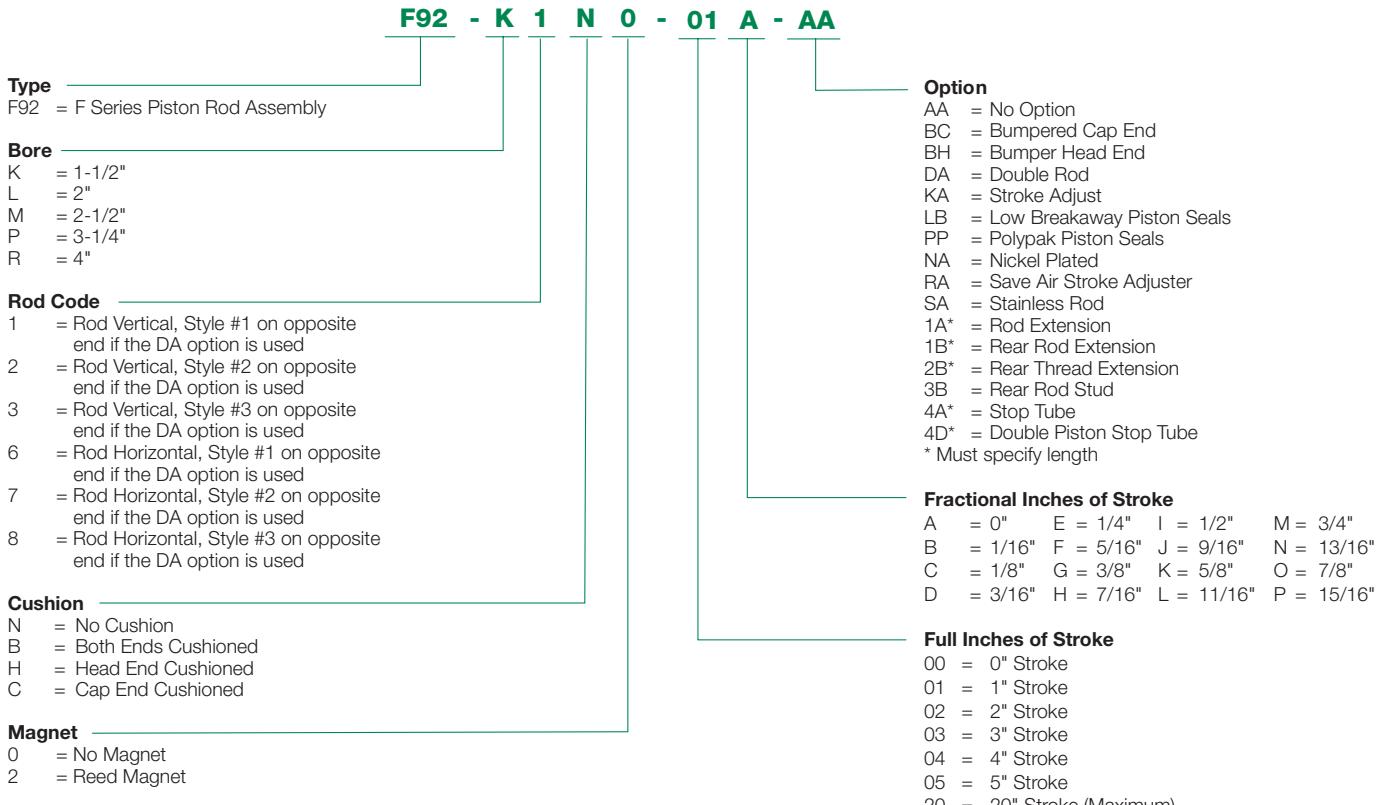

Note: Options listed are ones that apply to a piston rod assembly only.


Model number is set up to use option code supplied with original cylinder or with any above.

How to Order - F Series Repair Kit

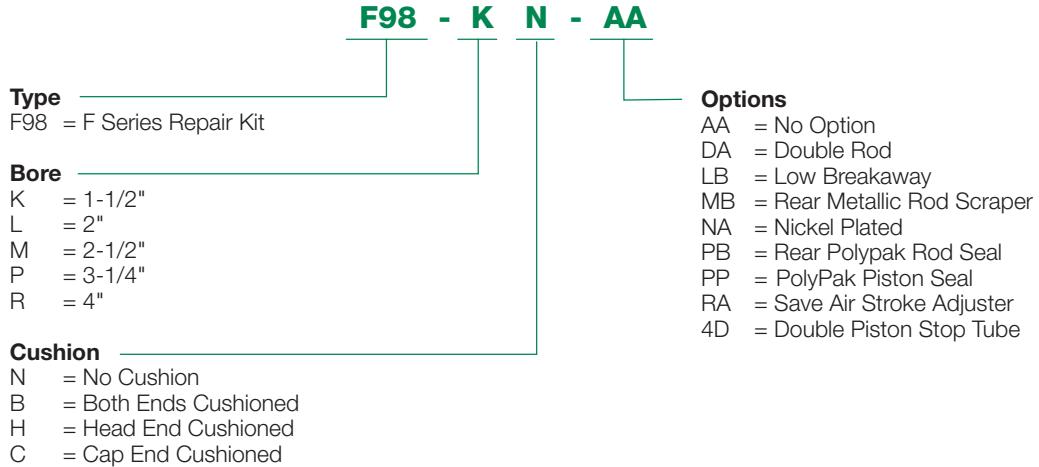

Note: Options listed are ones that apply to a repair kit only.
Model number is set up to use option code supplied with original cylinder or with any above.

How to Order - F Series Seal Kit

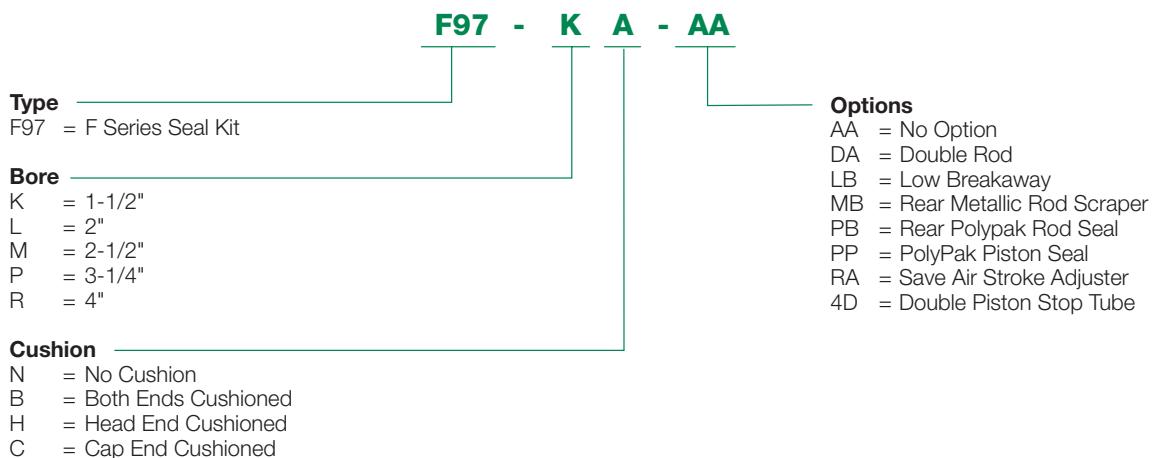


Note: Options listed are ones that apply to a seal kit only.
Model number is set up to use option code supplied with original cylinder or with any above.

Piston Rod Assembly Kit Removal/Installation Instructions


Repair and Seal Kit Removal/Installation Instructions

Diagrams

Pneumatic Service Temperatures:
Nitrile Seals: -10°F (-23°C) to 165°F (74°C)

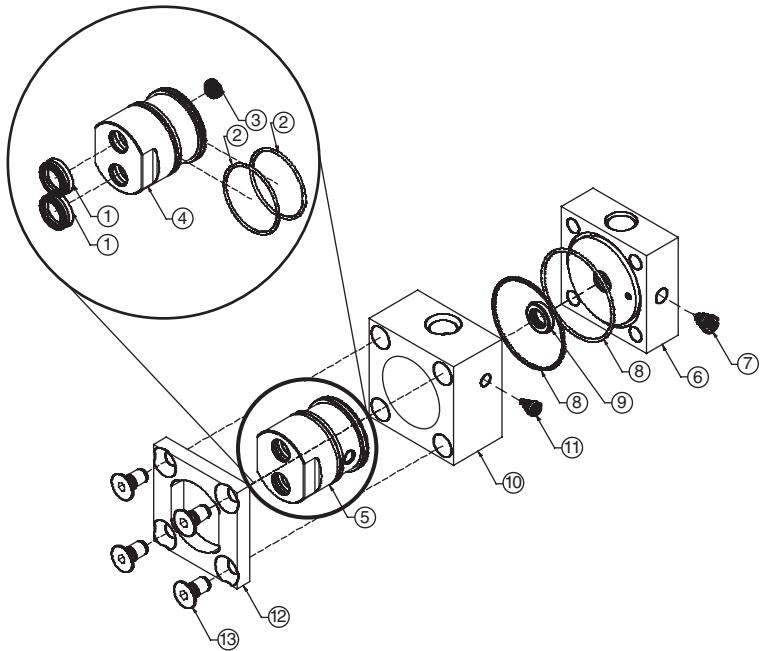


Head, Cap, and Bushing Assembly

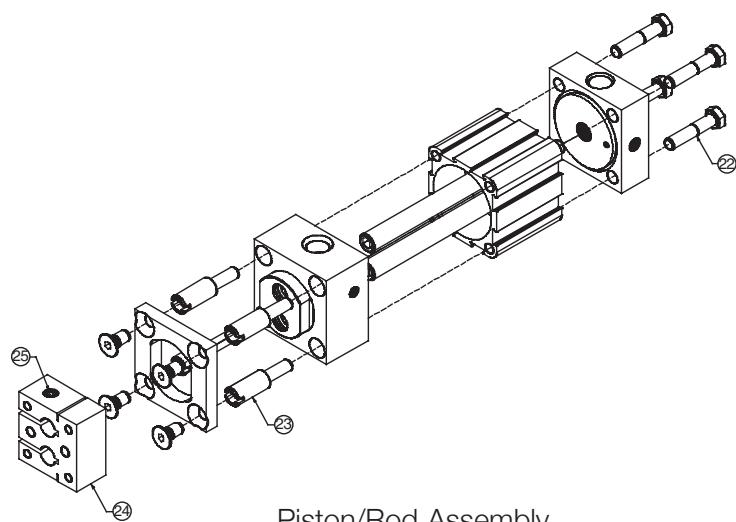

Piston/Rod Assembly


F Series

Part #	Description	Parts included in:		
		Seal Kit	Repair Kit	Piston/Rod Assembly
1	Rod Seal/Wiper	X		
2	Bushing O-ring	X		
3	Head Cushion Seal	X	X	
4	Bushing			
5	Loaded Bushing Assembly		X	
6	Cap			
7	Cap Cushion Needle			
8	Tube End Seal	X	X	
9	Cap Cushion Seal	X	X	
10	Head			
11	Head Cushion Needle			
12	Bushing Retainer			
13	Retainer Screws			
14	Wearband	X	X	
15	Magnet			X
16	Back-up Rings	X	X	
17	Piston Seal	X	X	
18	Head Cushion Spear			X
19	Cap Cushion Spear			X
20	Piston			X
21	Tube			
22	Hex Bolts			
23	Sleeve Bolts			
24	Tooling Plate			
25	Tooling Plate Screw			
26	Rods			X


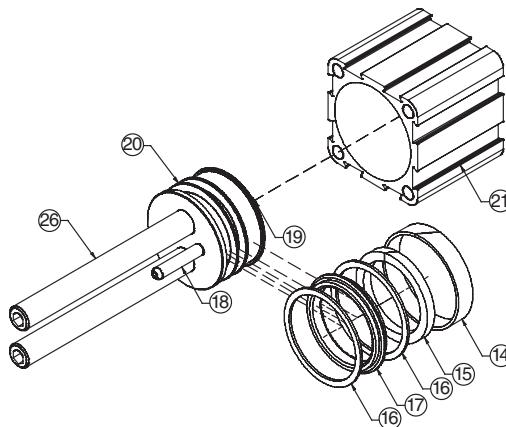


Cylinder Assembly and Tie Rod Torque


Seal Installation Guide




Loaded Bushing



Cushioned Cap



Low Breakaway Piston



T-Seal Piston

Bushing Retainer Screws Torque
Tolerances (lbs-ft) Part #13

Size	Min.	Max.
1/4-28	5	7
5/16-24	10	12
3/8 - 24	15	20

Bore	Min.	Max.
1-1/2"	8	10
2"	15	20
2-1/2"	15	20
3-1/4"	23	30
4"	23	30

Note: Sinker Tubes are not included in kits. They can be ordered using the part numbers from the provided chart.

Sinker Tube Part
Numbers

Bore	Part #
1-1/2"	A06-K91
2"	A06-L91
2-1/2"	A06-M91
3-1/4"	A06-P91
4"	A06-R91



World Class Supplier of Pneumatic Components



World Headquarters

USA Numatics, Incorporated

46280 Dylan Drive
Novi, Michigan 48377
P: 248-596-3200
F: 248-596-3201

Canada Numatics, Ltd

P: 519-758-2700
F: 519-758-5540

México - Ascomatica SA de CV

P: 52 55 58 09 56 40 (DF y Area metropolitana)
P: 01 800 000 ASCO (2726) (Interior de la República)
F: 52 55 58 09 56 60

Brazil Ascoval Ind.e Comercio Ltda

P: (55) 11-4208-1700
F: (55) 11-4195-3970