

ViX Series

Small, Intelligent and Powerful Digital Servo/Stepper Drives and Drive/Controllers


With its all-digital, DC-powered design, the ViX family of award-winning drives and drive/controllers offers a new level of economical servo performance. Available in both drive-only and intelligent-drive/controller platforms, the ViX family gives users a robust and cost-effective DC product, particularly in multi-axis applications.

Designed for easy set-up and tuning, the ViX uses wizards-based software that enables users to implement a fully configured system within minutes of unpacking the unit. Its small size—just 4.9 x 1.65 x 3.35 inches—makes it ideal for narrow applications and for direct-panel mounting, or for attachment to a standard DIN rail using an optional adapter.

ViX General Features

- Up to 80VDC bus voltage
- Compact size: 4.9 x 1.65 x 3.35 inches
- Standard RS232C ASCII interface
- 5 digital inputs and 3 digital outputs (software configurable)
- CE (EMC & LVD), UL compliant
- Auto-correction of motor phase/feedback wiring (servo only)

ViX Part Numbering System

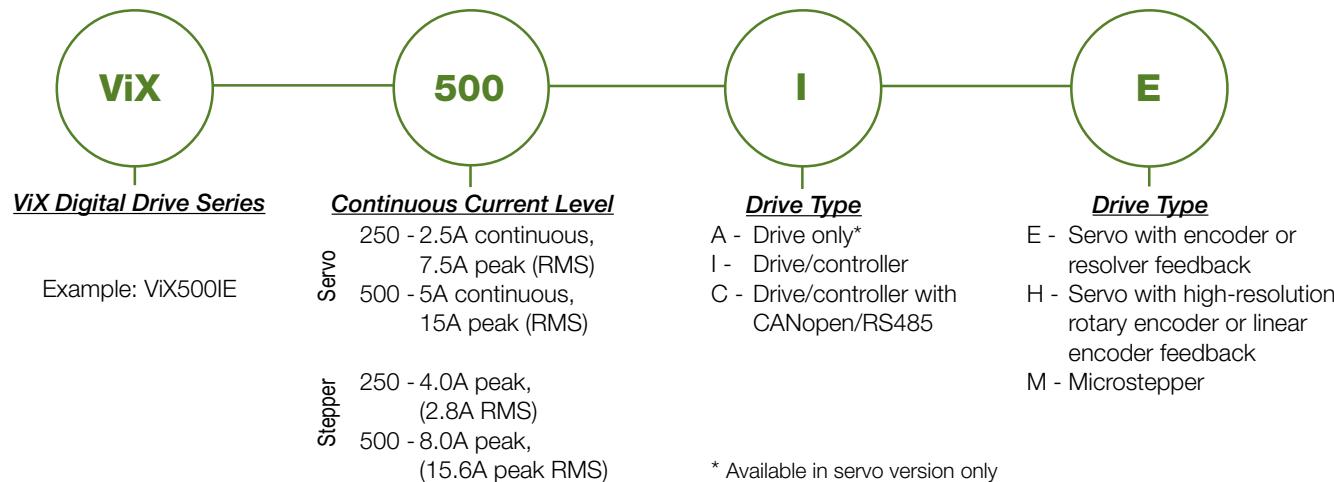

Servo-Specific Features

- Accepts analog ($\pm 10V$), step/direction, CW/CCW signals
- Encoder following
- Current outputs of 2.5A RMS continuous and 5A RMS continuous
- Resolver or encoder feedback

Stepper-Specific Features

- Integer selectable resolution from 200 to 51,200 steps/rev
- Anti-resonance circuitry suppresses mid-range instability
- Recommended motor inductance range of 0.5 mH to 20 mH

Servo and Stepper Optional Controller-Specific Features

- Storage of up to 16 sequences
- Encoder following, registration, feed-rate override
- 5 digital inputs, 3 digital outputs, 1 analog input
- Conditional statements
- Optional RS485/CANbus interface

ViX Common Specifications

Drive Input Power**Voltage****ViX500****ViX250****Controller input power****Drive Output Current****ViX500****ViX250****Physical****Compumotor motors****Motor inductance range****Motor current limit****PWM/Motor ripple frequency****Protection****Performance****Feedback device (servo only)****Resolver feedback (servo only)****Encoder feedback****Encoder supply****Drive Command Inputs****(AE, AH models only)****Velocity and Torque modes****Position mode****Digital Inputs****Encoder following input****Outputs****Digital outputs****Encoder output****Fault output****Analog output****Motor brake output****Communication****Communication interface****High-speed interface****Diagnostics****LEDs****Environmental****Drive temperature range****Humidity**

48-80VDC +5%, -15%

24-80VDC +5%, -15%

24VDC, 250mA (no outputs loaded)

Servo

5A RMS continuous, 15A RMS peak*

Stepper

8.0A pk (5.6 Arms)

2.5A RMS continuous, 7.5A RMS peak*

4.0A pk (2.8 Arms)

See table on page 3

0.5-10mH recommended (speed range reduced if >10mH)

Selectable by software

20 KHz/40 KHz

Short-circuit, brownout, over-voltage, under-voltage, drive/motor over-temperature I^2t , feedback fault

Resolver or quadrature encoder (selected by software)

12-bit A-to-D input (gives 4096 counts/rev), absolute accuracy 30 arc-min

5V differential, 400 KHz max. input frequency (pre-quadrature), resolution 1000, 1024, 2000 or 5000 lines (i.e., up to 20,000 counts/rev). The H series has fully variable resolution and will support up to 2.5 MHz pre-quadrature encoder input.

5V output for feedback and following encoder, 250mA maximum loading

 $\pm 10V$ differential, 12-bit resolution

Step/direction, step+/step- or quadrature encoder** input with resolution equivalent to feedback device

5, of which 4 are configurable as Home, Limits and Registration. Operating range 5V to 24V. Software configurable 4K7 pull-up/active low or 4K7 pull-down/active high

Compatible with feedback resolution, max. input frequency 2.5MHz. Also configurable as step/direction or step+/step- input

3 - 1 is configurable as Drive OK. Software-configurable active-low/sinking (5V-24V) or active-high/sourcing (24V only). 50mA maximum per output

Fixed resolution (dependent on feedback device)

NPN open-collector output, normally low, active high

10-bit filtered PWM monitor output, torque or velocity

24V, 2A maximum, energized to release

9-pin D-shell (female) connector for RS232 (standard); combined RS485 & CANopen option available

Dual RJ45 connectors for CANopen, RS485 option, etc., also provide daisychain ports for multi-drop RS232 connections

3 LEDs for feedback, drive and communication status


32-122°F (0-50°C) local environment fan (fan cooling required about 104°F (40°C))

0-95% non-condensing

* Maximum duration at peak current - 2 seconds; maximum duty cycle - 10%. The time limit is set by an I^2t circuit and will be reduced if the motor is stationary.


** ViX drive/controller versions (IE, IH) also accept quadrature encoder signals for following.

Servo Motor Speed-Torque Performance Curves

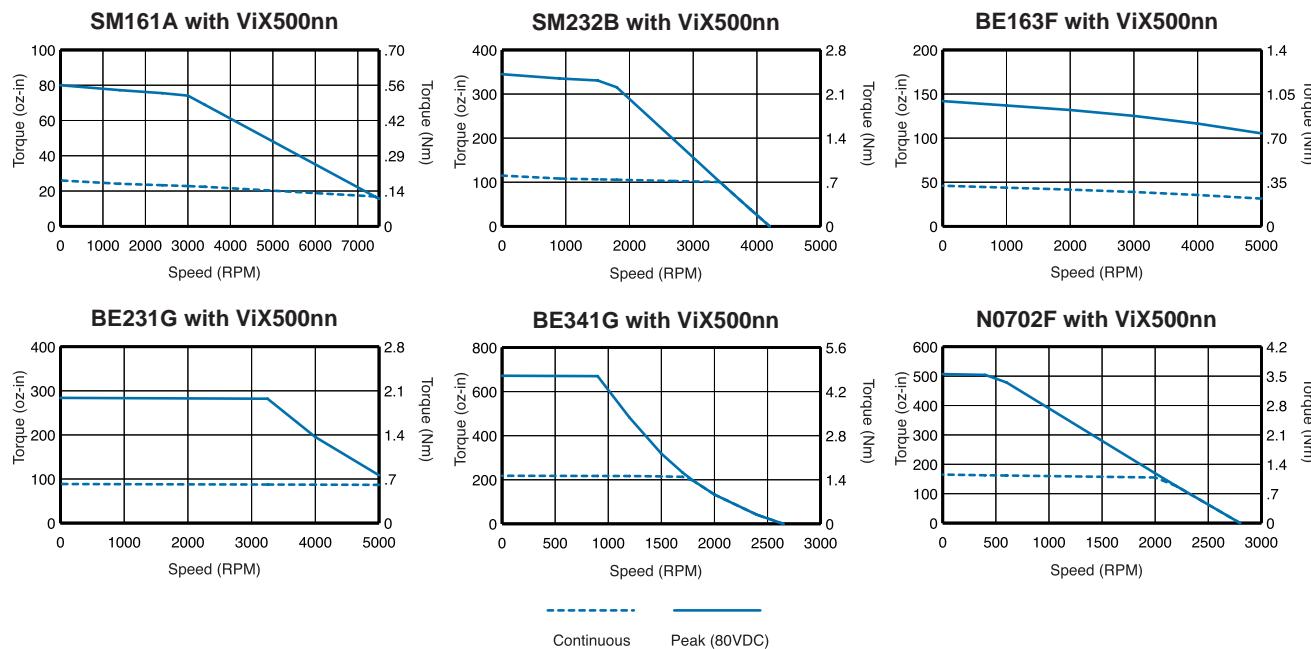

Stepper Motor Speed-Torque Performance Curves

Note: Motors in speed-torque curves are wired in series.

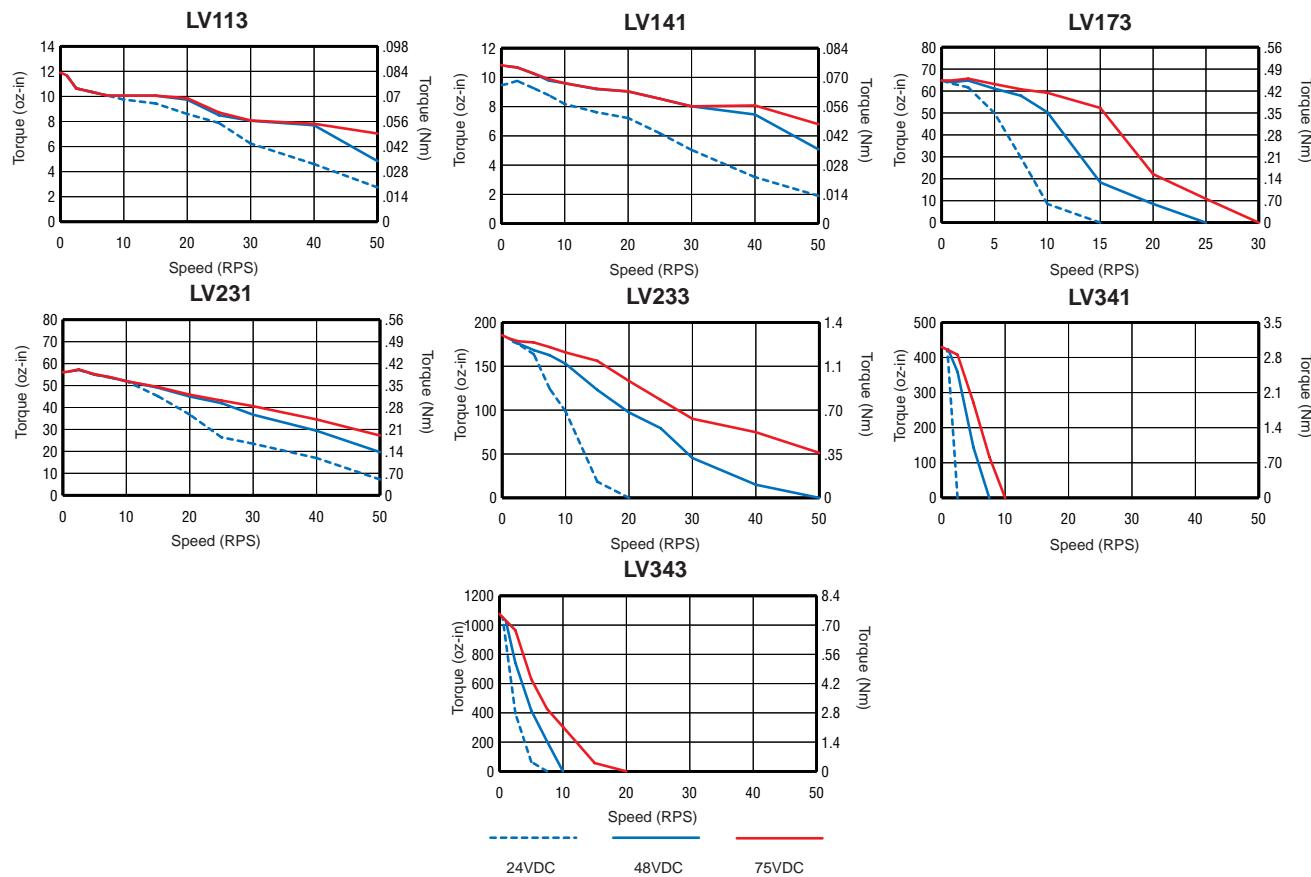

For a comprehensive display of all ViX drive/motor speed-torque curves, please log on to parkermotion.com

ViX Compatible Motors & Accessories

Servo Drives

ViX250AE
ViX250AH
ViX250IE
ViX250IH

Servo Motors

SM160An-nPSn
SM161An-nPSn
SM162An-nPSn
SM230An-nPSn
SM231An-nPSn
SM232An-nPSn
SM233An-nPSn
BE161Cn-nPSn
BE162Cn-nPSn
BE163Cn-nPSn
BE164Cn-nPSn
BE230Gn-nPSn
BE231Gn-nPSn
BE232Gn-nPSn
BE233Gn-nPSn
N0701Dn-nPSn
N0702En-nPSn

Servo Drives

ViX500AE
ViX500AH
ViX500IE
ViX500IH

Servo Motors

SM160An-nPSn
SM161An-nPSn
SM162An-nPSn
SM230An-nPSn
SM231An-nPSn
SM231Bn-nPSn
SM232Bn-nPSn
SM233Bn-nPSn
BE161Fn-nPSn
BE162Fn-nPSn
BE163Fn-nPSn
BE164Fn-nPSn
BE230Gn-nPSn
BE231Gn-nPSn
BE232Gn-nPSn
BE233Gn-nPSn
BE341Gn-nPSn
BE342Hn-nPSn
N0701Fn-nPSn
N0702Fn-nPSn

ViX Stepper Drive/Controller Compatible Motors & Accessories

Stepper Drives

ViX250IM
ViX500IM

Stepper Motors

LV113
LV141
LV173
LV231
LV233
LV341
LV343

ViX Accessories

XL-PSU
ViX RS232-08
ViX RS232-16
VM15-PF
VM15-PM
DIN Rail Kit

80 VDC, 250 W Power Supply Module
8' RS232 Communication Cable (CE)
16' RS232 Communication Cable (CE)
ViX Breakout Module and Cable for
I/O Connector
ViX Breakout Module and Cable for
Analog/Encoder Connector
ViX DIN Rail Mounting Kit

ViX Dimensions in inches (mm) – all models

