



Key Features

- **High Accuracy - Controls flow rate to within $\pm 1\%$ of set point; ideal for fluid blending and/or dispense applications**
- **Fast Response 3 seconds (typically < 2 seconds for most applications)**
- **High flow turndown ratio (20:1)**
- **Wide range of flow control capability; 50 ml/min - 4000 ml/min**
- **All Polytetrafluoroethylene (PTFE) / Perfluoroalkoxy (PFA) wetted part construction – ensures compatibility with UHP liquid chemicals, and DI water.**
- **With in-built pressure sensor analog output**
- **Low maintenance - modules featuring ultrasonic flow meters with NO moving parts, providing the ultimate in uptime.**

LFC-7650

Integrated Flow Control Module


Description

The LFC-7650 Series is a line of high-performance closed-loop flow controllers with integrated pressure transducer designed for use in a wide variety of high-purity liquids including DI water and harsh chemicals.

A typical module combines a Malema Sensors® ultrasonic flow meter with a Malema control valve. It sets the standard for flow measurement in terms of accuracy, repeatability, turndown and purity. It's Digital Signal Processing (DSP) technology ensures reliable performance even with a certain degree of bubbles present in the process fluids. The high speed/precision motor actuated diaphragm valve helps provide a fast precise response with minimal overshoot.

In operation, the user inputs a flow rate set point via an analog signal. The flow control electronics module continuously compares this set point value with the flow rate reported by the flow meter and drives the motor to modulate the control valve to maintain the desired set point. State of the art control algorithm together with a high speed/precision flow meter and valve achieves fast, accurate, and repeatable control.

Typical Block Diagram

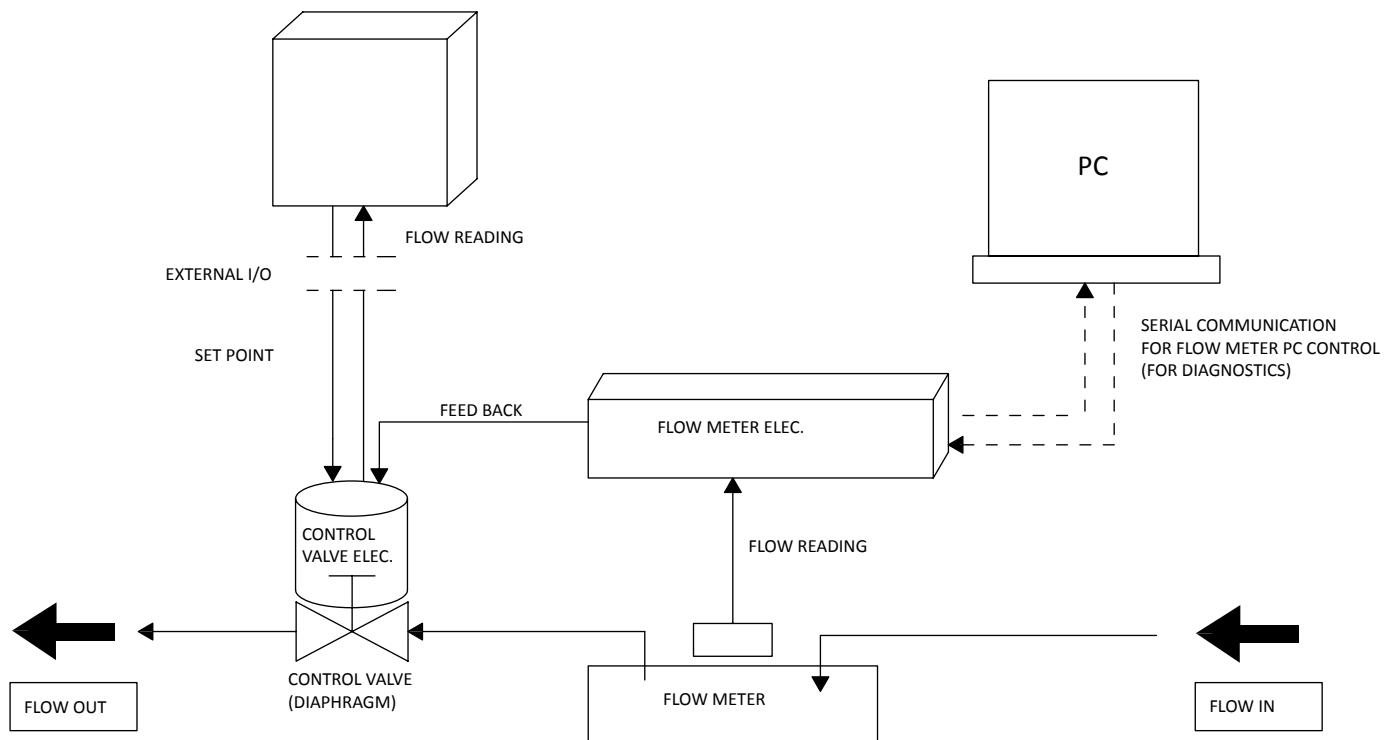

Applications

- Semiconductor CMP (Chemical Mechanical Planarization) tools - used to precisely control the flow of DI water and chemical slurries
- Wet Cleaning tools – for accurate and reliable control of the blending and delivery of cleaning chemistries.
- Copper Plating tools – well suited for chemical mixing and dispensing applications.

Specifications

Performance Specifications

Flow Controllability Range (Available in 8 standard ranges)	5 - 50 ml/min (1/4")
	10 - 100 ml/min (1/4")
	25 - 250 ml/min (1/4")
	50 - 500 ml/min (1/4")
	100 - 1000 ml/min (1/4" or 3/8")
	125 - 1250 ml/min (1/4" or 3/8")
	250 - 2500 ml/min (1/4" or 3/8")
	400 - 4000 ml/min (3/8")
	Custom
Pressure Measurement (Optional)	0 - 60 psi ***
Pressure Accuracy	±1% of Full Scale
Accuracy of Flow Control *	for 1/4": ±1% of set point or ±3 ml/min (whichever is larger) for 3/8": ±1% of set point or ±6 ml/min (whichever is larger)
Repeatability *	for 1/4": ±0.5% of set point or ± 1.5 ml/min (whichever is larger) for 3/8": ±0.5% of set point or ± 3 ml/min (whichever is larger)
Flow Control Time	< 3 sec
Fluid Temperature	Max 60 °C **
Maximum Expected Operating Pressure	0.4 MPa (60 psig)
Maximum Safe Internal Pressure	0.5 MPa (70 psig)
Ambient Temp/Humidity	0 – 40 °C (30 – 80% R.H., without DEW)
Minimum Differential Pressure	10 psid

* Please consult with Malema for tighter accuracy/repeatability needs.

** Contact the factory for higher fluid temperature requirements.

*** Contact factory for other pressure ranges

Electrical Specifications

Electrical Input	24 V DC ± 10%
Consumption	Max 0.5 A
Set Point Signal In*	0 - 5 V DC or 0 - 10 V DC or 4 - 20 mA (input resistance 250 Ω)
Flow Signal Out**	4 - 20 mA Passive
Pressure Signal Out	4 - 20 mA Passive

* Consult the factory for other options

** Configured as Passive output as default. Consult the factory for other options.

Material Specifications

Wetted parts for Modules	PFA, PTFE, Kalrez or equivalent
Non wetted parts, enclosure	ABS, PEEK, PVC*
Connectors	PPS

* Flame retardant (FMET4325)

Physical Specifications

Mounting Orientation	Horizontal
Fluid Connections	Inlet/Outlet: 1/4" or 3/8", Male Flare or Male Super Pillar 300
Flow Restrictions (orifice)	> 2 mm
Ingress Rating	IP64

* Consult the factory for other options

Power and Signal Connections

It is always recommended to use a dedicated power supply with 24 V DC ($\pm 10\%$), 500 mA. The configuration of the 12 pin I/O connector is given in the table below (See note below).

NOTE:

- User is required to order the standard mating cable or custom mating adapter cable with every controller (Please refer to the model code table).
- Refer to custom mating adapter cable options below. Please consult the factory for any other custom mating / adapter cable requirement.
- An optional communication cable with a 6 pin connector can be ordered separately to interface with the PC GUI program.

Standard Hirose I/O Mating Cable Configuration				
Pin No.	Wire Color	Description	Specification	Remarks
1	Red	Power (+) 24 V DC	24 V DC $\pm 10\%$	
2	Black	Power (-) 0 V DC		
3	Pink	Set Point (+)	0 – 5 V DC or 0 – 10 V DC or 4 – 20 mA	Input resistance 250 Ω
4	Gray	Set Point (-)		
5	Blue	Flow, Output*	4 – 20 mA Out	Passive connection
6	White	Flow, Supply*	+24 V DC, loop	Passive connection
7	Red/Black	Pressure, Output (Optional)	4 – 20 mA Out	Passive connection
8	White/Black	Pressure, Supply (Optional)	+24 V DC, loop	Passive connection
9	Yellow	Sensor or Valve Alarm (+)**	Max. rating 30 V DC, 200 mA	Open Collector Output
10	Brown	Sensor or Valve Alarm (-) (0 V DC)**		
11	Green	Zero Adjust***	0 V DC: Normal operation 24 V DC: Zero Adjust	Pull up to power supply voltage starts the zero adjustment
12	Violet	No Connection		

* 4-20 mA (Passive) is the default output type. Please consult the factory for other options.

** Sensor alarm factory set as default. Field configurable for other options.

*** Make sure the flow is completely stopped before zero adjust.

Custom mating adapter cable options

Hirose - Turck adapter cable P/N: CABLE-LFC-7650-001			Hirose - Alden adapter cable P/N: CABLE-CMETER 041		
CONNECTOR PIN NO	CONNECTOR PIN NO	DESCRIPTION	CONNECTOR PIN NO	CONNECTOR PIN NO	DESCRIPTION
TURCK	HIROSE		ALDEN	HIROSE	
M	1	Power 24VDC+	11	1	Power 24VDC+
U	2	GROUND	12	2	GROUND
R	3	SETPOINT +	6	3	SETPOINT + (0 -5V DC)
G	4	SETPOINT COMMON	7	4	SETPOINT COMMON
C	5	FLOW O/P 4 - 20 mA	4	5	FLOW O/P 4 - 20 mA
E	6	+24 VDC LOOP POWER	2	6	FLOW (LOOP POWER)+24 VDC
P	7	PRESSURE OUT	1	7	PRESSURE 4 - 20 mA
O	8	PRESSURE +24VDC	3	8	PRESSURE +24VDC
A	9	NOT USED	8	9	N/C
L	10	NOT USED	9	10	N/C
N	11	ZEROING	5	11	ZEROING
J	12	N/C	10	12	N/C
S		N/C	13	13	N/C
T		N/C	14	14	N/C


* 4-20 mA (Passive) is the default output type. Please consult the factory for other options.

*** Make sure the flow is completely stopped before zero adjust.


Dimensional Drawings

For reference only

Dimensions for 1/4" Flare end connections

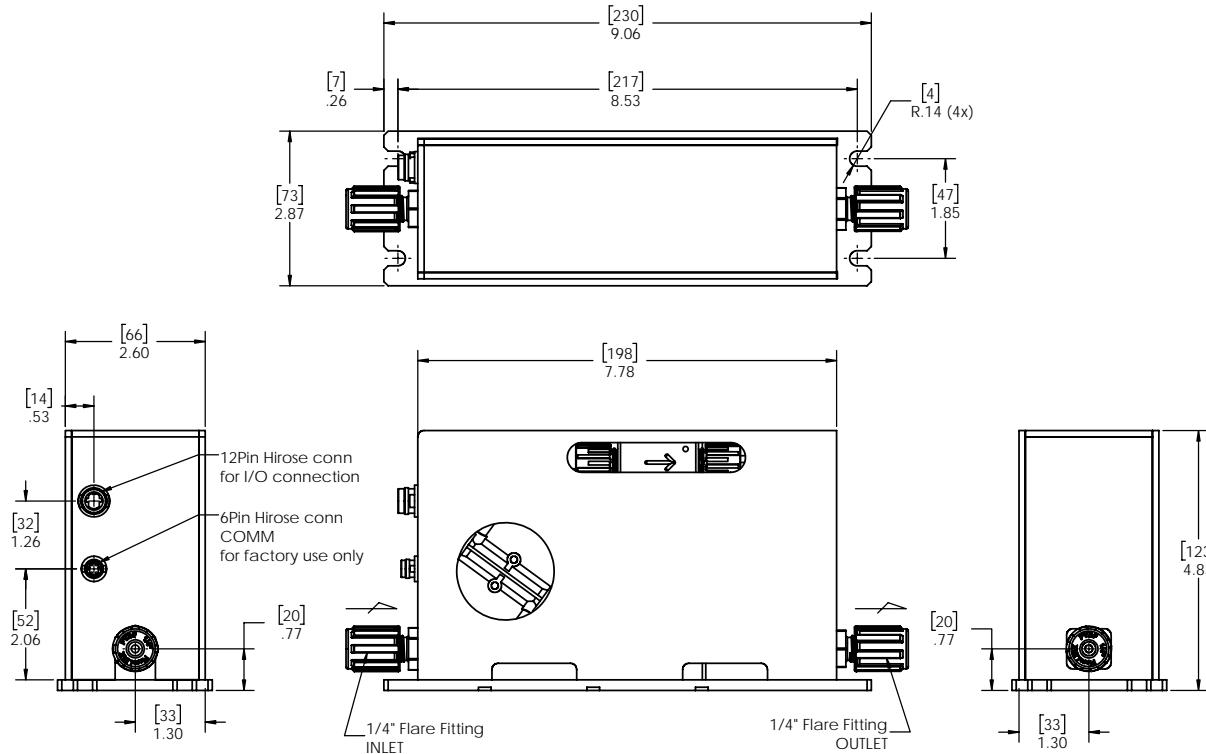

Dimensions for 3/8" Flare end connections

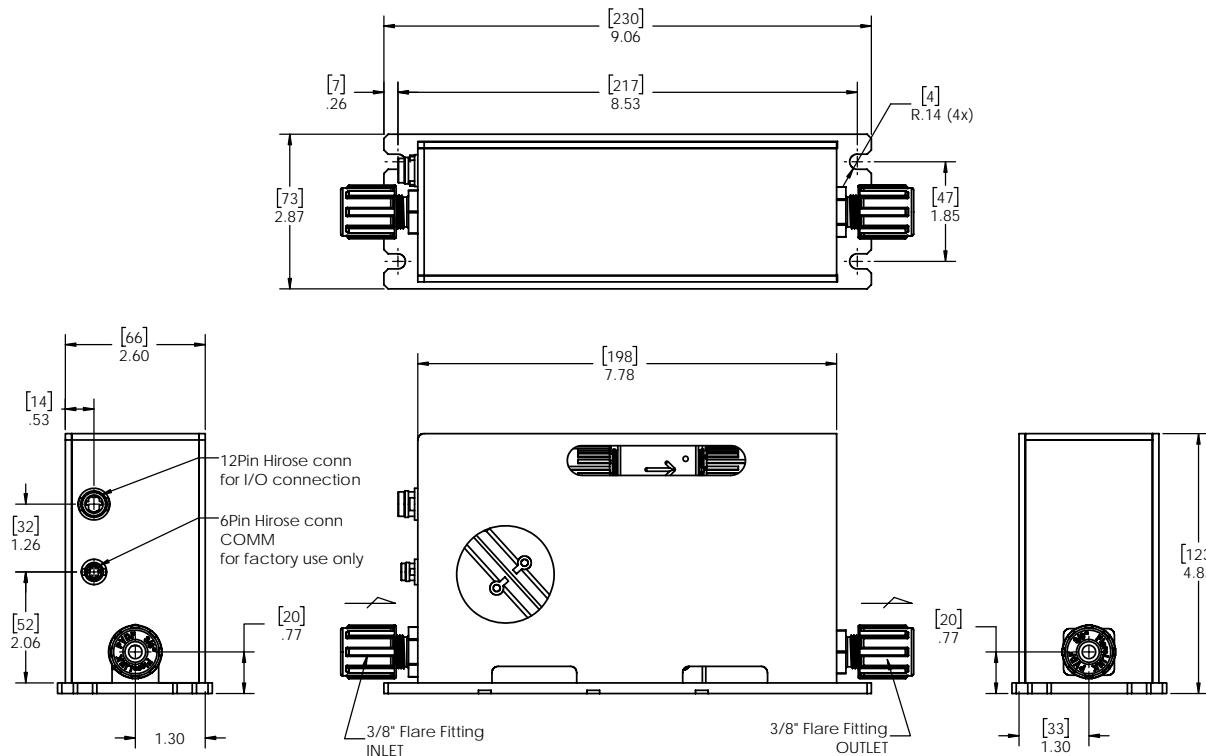

Ordering Information

Model Code															Description														
LFC-7650	-	*	*	**	-	*	*	*	*	-	*	*	*	-	***														
Fluid Connection		1														1/4" Inlet & Outlet													
		2														3/8" Inlet & Outlet													
Connection Type		1														Flare (Male)													
		2														Super Pillar 300 (Male)													
Standard Full Scale Range	01														5 – 50 ml/min (1/4")														
	02														10 – 100 ml/min (1/4")														
	03														25 – 250 ml/min (1/4")														
	04														50 – 500 ml/min (1/4")														
	05														100 – 1000 ml/min (1/4" or 3/8")														
	06														125 – 1250 ml/min (1/4" or 3/8")														
	07														250 – 2500 ml/min (1/4" or 3/8")														
	08														400 – 4000 ml/min (3/8")														
	09														Custom														
	-																												
Sensor / Converter	1														M-2111 Mini (3mm) / DSP														
	2														M-2111 Mini (5mm) / DSP														
Set Point / Flow Output	1														0 – 5 V DC / 4 – 20 mA (passive)														
	2														0 – 10 V DC / 4 – 20 mA (passive)														
	3														4 – 20 mA / 4 – 20 mA (passive)														
	4														Custom														
Pressure Measurement (Optional)	1														Yes (4 – 20 mA passive output)														
	2														Not Required														
Valve Type															Diaphragm Valve														
Mounting Orientation															Horizontal														
Accessories															With standard Hirose I/O mating cable														
															Custom														
															Unique PN identifier														

© 2022 Malema Engineering Corporation. All rights reserved.

Malema Sensors is a registered trademark of Malema Engineering Corporation. Malema, the Malema logo, and Malema Engineering Corporation are trademarks of Malema Engineering Corporation. All other trademarks are property of their respective owners.

Malema supplies this publication for informational purposes only. While every effort has been made to ensure accuracy, this publication is not intended to make performance claims or process recommendations. Malema does not warrant, guarantee, or assume any legal liability for the accuracy, completeness, timeliness, reliability, or usefulness of any information, product, or process described herein. We reserve the right to modify or improve the designs or specifications of our products at any time without notice. For actual product information and recommendations, please contact your local Malema representative.

Corporate Headquarters
1060 S Rogers Circle
Boca Raton, FL 33487

P: (561) 995-0595 F: (561) 995-0622

West Coast Headquarters
2329 Zanker Road
San Jose, CA 95131

P: (408) 970-3419 F: (408) 970-3426

Asia Pacific Headquarters
35 Marsiling Industrial Estate Road 3 #02-06
Singapore 739257
P: (65) 6482-3533 F: (65) 6484-4231