



# SELECTION GUIDE

## SELECTION GUIDE

Pressure, Flow  
& Liquid Level Products  
for Aerospace & Military Uses



P R E C I S I O N  
S E N S O R S

# Altitude Switches


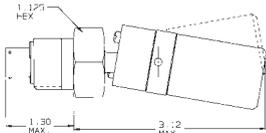
## PRECISION SENSORS

50 Seemans Lane  
 Milford, CT 06460 USA  
 Telephone: 203 877 2795  
 Fax: 203 877 8752  
 www.precisionensors.com



MODEL NUMBER	A45C	A37C	E45C	E37C
Medium	Air or Inert Gas			
Type	Factory Set	Factory Set	Factory Set	Factory Set
Available Settings	0.2 to 20 psia	2 to 30 psia	0.2 to 20 psia	2 to 30 psia
Actuation Value	0.15 to 0.8 psia	0.3 to 1.0 psia	0.15 to 0.8 psia	0.3 to 1.0 psia
Repeatability	+/- 0.1 psia +0.5% of setting	+/- 0.2 psia +0.5% of setting	+/- 0.1 psia +0.5% of setting	+/- 0.2 psia +0.5% of setting
Proof Pressure	20 psia	30 psia	20 psia	30 psia
Burst Pressure			75 psia	100 psia
Operating Temp. Range	-65 to 160F	-65 to 160F	-65 to 160F	-65 to 160F
Electrical Rating	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC
Construction & Wetted Materials	Ni-Span-C Capsule sensor Aluminum housing Electrical switch			
Media Connection	None (Ambient sensor)	None (Ambient sensor)	MS fittings	MS fittings
Electrical Connection	Solder terminals Free leads	Solder terminals Free leads	Solder hooks Mil connectors	Solder hooks Mil connectors
Typical Weight	0.08 lbs	0.063 lbs	0.22 lbs	0.14 lbs
Options	30 psia proof	Proof to 120 psia Dual switches	Momentary contacts	Momentary contacts
Warranty	1.5 Years	1.5 Years	1.5 Years	1.5 Years
Dimensions				

# Liquid Level Switches

	
<b>L14F</b>	<b>L16H</b>
Liquid	Liquid
Factory Set	Factory Set
Up to 12"	Consult Factory
Approx 0.1"	Consult Factory
Consult Factory	Consult Factory
130 psig	5000 psig
-65 to 160F	-65 to 160F
Up to 0.5 amp or 10 watts res. @ 28 VDC	Up to 0.5 amp. or 10 watts res. @ 28 VDC
Magnetic reed switch Al, SS, Buna-N or Teflon float	Magnetic reed switch Al, SS or Nylon float
Top or Bottom mount	Side mount Flange, Threaded
Free leads Modular connector	Free leads Modular connector
Length dependent	0.2 lbs
High pressure High Temp.	High pressure
1.5 Years	1.5 Years
	

## Multi-Function Products:



- Pressure
- Temperature
- Dual Flow
- Check Valve



### Applications include control and monitor of:

- Cabin Air Thrust
- Antilock Brake Valve
- Thrust Reverse Valve
- Environmental Control
- Boot Strap Hydraulics
- Engine Oil Pressure
- Aircraft Hydraulics
- Fuel Level & Fuel Flow
- Anti-Icing System
- Engine Bleed Air
- Filters
- Airspeed
- Altitude
- Fuel Pressure
- Coolant Flow

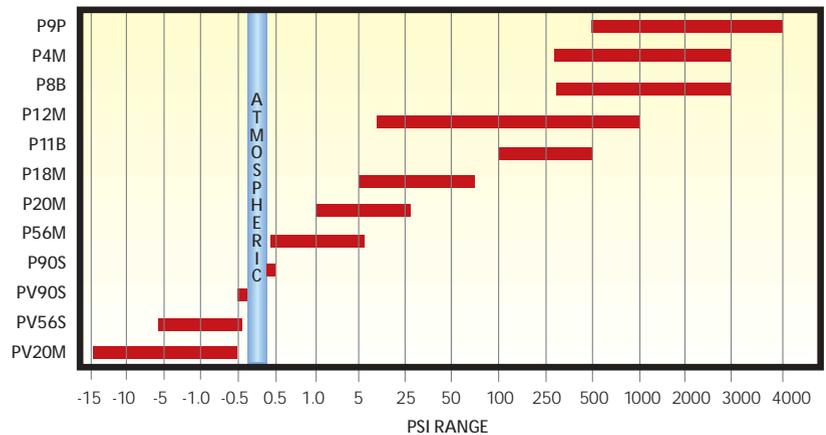
## Custom Manifolds:



- Flow Indication
- Flow Regulation
- Temperature Sensing
- Pressure Indication
- Quick Disconnect



## Gauge Pressure Selection Chart



## Definitions:

- Absolute Pressure Switch:** a switch designed to actuate at points referenced to absolute zero
- Altitude Switch:** an absolute pressure switch with actuation points referenced as a distance of altitude
- Gauge Pressure Switch:** a switch designed to actuate at points referenced to atmospheric pressure
- Differential Pressure Switch:** a switch that detects variations in a fixed difference between two pressures
- Vacuum Switch:** a switch designed to actuate at a pressure below ambient (pressure of the surrounding atmosphere)
- Actuation Value:** the difference in value between the switch point on increasing pressure and decreasing pressure
- Proof Pressure:** the maximum pressure that can be applied without damage or calibration shift

# Gauge Pressure Switches







## PRECISION SENSORS

50 Seemans Lane  
Milford, CT 06460 USA  
Telephone: 203 877 2795  
Fax: 203 877 8752  
www.precisionensors.com



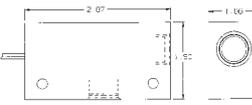
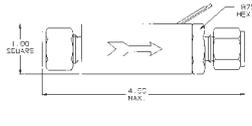

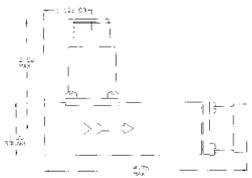

MODEL NUMBER	PV20M	PV56M	PV90S/P90S	P56M	P20M
Medium	Gas or Liquid	Gas	Gas	Gas or Liquid	Gas or Liquid
Type	Factory Set	Factory Set	Factory Set	Factory Set	Factory Set
Available Settings	0.5 to 14 psiv	0.3 to 6 psiv	0.04 to 0.5 psiv/psig	0.25 to 6.0 psig	1.0 to 30 psig
Actuation Value	0.25 psiv +5% of setting	0.2 psiv +5% of setting	0.01 psiv/psig +2% of setting	0.2 psig +5% of setting	0.3 psig +7% of setting
Repeatability	+/- 0.1 psiv +2% of setting	+/- 0.05 psiv +3% of setting	+/- 0.005 psiv/psig +1% of setting	+/- 0.05 psig +3% of setting	+/- 0.1 psig +2% of setting
Proof Pressure	100 psig	up to 15 psig	2 psiv/psig	200 psig	200 psig
Burst Pressure	500 psig	500 psig	10 psig	500 psig	1000 psig
Operating Temp. Range	-65 to 250F	-65 to 160F	-65 to 160F	-65 to 160F	-65 to 250F
Electrical Rating	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 3A @ 250VAC,	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC
Construction & Wetted Materials	Polyimide Diaphragm, Elastomer seal, Aluminum or SS	Silicone Diaphragm, Elastomer seal, Aluminum	Silicone Diaphragm, Aluminum	Polyimide Diaphragm, Elastomer seal, Aluminum	Polyimide Diaphragm, Elastomer seal, Aluminum or SS
Media Connection	MS fittings Pipe fittings	MS fittings Pipe fittings	MS fittings Barb fittings	MS fittings Pipe fittings	MS fittings Pipe fittings
Electrical Connection	MS connectors Free leads	MS connectors Free leads	Terminal blades	MS connectors Free leads	MS connectors Free leads
Typical Weight	0.20 lbs	0.37 lbs	0.6 lbs	0.37 lbs	0.3 lbs
Options	Environmental seal Hermetic seal High Temp	Hermetic seal High Temp Panel mount	Custom fittings Panel mount	Hermetic seal High Temp Panel mount	Environ. or Herm. seal, dual switch High Temp
Warranty	1.5 Years	1.5 Years	1.5 Years	1.5 Years	1.5 Years
Dimensions					

# Gauge Pressure Switches

					
P18M	P11B	P12M	P8B	P6P	P4M
Gas or Liquid	Gas or Liquid	Gas or Liquid	Gas or Liquid	Liquid	Gas or Liquid
Factory Set					
5 to 60 psig	100 to 500 psig	15 to 1000 psig	300 to 3000 psig	400 to 5000 psig	300 to 3000 psig
1 psig +9% of setting	10 psig +4% of setting	2 psig +10% of setting	20 psig +5% of setting	100 psig +5% of setting	20 psig +12% of setting
+/- 0.5 psig +2% of setting	+/- 2 psig +2% of setting	+/- 2 psig +2% of setting	+/- 5 psig +2% of setting	+/- 50 psig +1.5% of setting	+/- 50 psig +2% of setting
500 psig	1000 psig	4500 psig	5000 psig	7500	6000 psig
1500 psig	5000 psig	7500 psig	7500 psig	10000 psig	10000 psig
-65 to 250F					
Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./5A Ind. @ 28 VDC
Polyimide Diaphragm, Elastomer seal, Aluminum or SS	316 SS Bellows, 300 series SS	Polyimide Diaphragm, Elastomer seal, Aluminum or SS	316 SS Bellows, 300 series SS	SS piston, Elastomer seal, Aluminum or SS	Polyimide Diaphragm, Elastomer seal, Aluminum or SS
MS fittings Pipe fittings	MS fittings	MS fittings Pipe fittings	MS fittings Custom fittings	MS fittings Custom fittings	MS fittings Custom fittings
MS connectors Free leads	MS connectors	MS connectors Free leads	MS connectors	MS connectors	MS connectors Free leads
0.23 lbs	0.3 lbs	0.18 lbs	0.3 lbs	0.22 lbs	0.2 lbs
Environmental seal Hermetic seal High Temp	Hermetic seal Dual switches High Temp	Environmental seal Hermetic seal High Temp			
1.5 Years					
					



# Flow Switches

				
V9F	V10F	V21F	V22F	V121F
Liquid	Liquid	Liquid	Liquid	Liquid
Factory Set	Factory Set	Factory Set	Factory Set	Factory Set
0.2 to 2 gpm	0.2 to 3 gpm	1.0 to 6 gpm	1.0 to 10 gpm	5 to 20 gpm
0.1 gpm +10% of setting	Min. 0.1 gpm or +10% of setting	Min. 0.25 gpm or +10% of setting	Min. 0.15 gpm or +10% of setting	+10% of setting
+/- 0.05 gpm +5% of setting	Min. +/- .05 gpm or +/- 5% of setting	Min. +/- .05 gpm or +/- 5% of setting	Min. +/- .05 gpm or +/- 3% of setting	+/- 0.3 gpm +3% of setting
3000 psig	1000 psig	150 psig	150 psig	150 psig
4500 psig	4500 psig	300 psig	300 psig	300 psig
-40 to 165F	-40 to 165F	-40 to 250F	-40 to 250F	-40 to 250F
Up to 0.5 amp or 10 watts res. @ 28 VDC	Up to 0.5 amp or 10 watts res. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./ .5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./ .5A Ind. @ 28 VDC	Silver Contacts: 5A @ 250VAC, 5A Res./3A Ind. @ 28 VDC Gold Contacts: 1A Res./ .5A Ind. @ 28 VDC
Magnetic sensor Aluminum or SS	Magnetic sensor Aluminum or SS Elastomer seal	Vane sensor Aluminum, SS or Brass Elastomer seal	Vane sensor Aluminum, SS or Brass Elastomer seal	Vane sensor Aluminum, SS or Brass Elastomer seal
MS fittings Pipe fittings	MS fittings Pipe fittings	MS fittings Pipe fittings	MS fittings Pipe fittings	MS fittings Pipe fittings
Free leads Modular connector	Free leads Modular connector	Mil connectors Solder hook	Mil connectors Solder hook	Mil connectors Solder hook
0.3 lbs	0.3 lbs	0.47 lbs	0.6 lbs	0.95 lbs
High Temp	High Temp Check valve	High pressure High Temp	High pressure High Temp	High pressure High Temp
1.5 Years	1.5 Years	1.5 Years	1.5 Years	1.5 Years
				

## U.S. SALES OFFICES

### NEW ENGLAND STATES

C. Long Associates  
3 Hearthstone Circle  
Natick, MA 01760  
Phone: 508 653 8526  
Fax: 508 652 1921  
Cblongs@aol.com

### ALABAMA, GEORGIA, NORTH AND SOUTH CAROLINA, FLORIDA AND TENNESSEE

Wyco Inc.  
11285 Elkins Road, Bldg A-1  
Roswell, GA 30076  
Phone: 770 843 8750  
Fax: 978 945 2582  
Jwrumrill@mindspring.com

### KANSAS

Fay Sales  
7701 E. Kellogg, Suite 630  
Wichita, KS 67207  
Phone: 316 687 4700  
Fax: 316 687 4950  
Ptilson@suite630.com

### TEXAS, OKLAHOMA

Fay Sales  
312 Harwood Road  
Bedford, TX 76021  
Phone: 817 268 0333  
Fax: 817 282 3756  
Faysales@ix.netcom.com

### NEW MEXICO, ARIZONA

Precision Sensors  
12630 Summerwood Glen  
Houston, TX 77041  
Phone: 832 243 0119  
Fax: 832 243 0140  
Rhooker@ueonline.com

### SOUTHERN CALIFORNIA, ARIZONA AND UTAH

McCormick Associates  
147 Agate Street  
Laguna Beach, CA 92651  
Phone: 949 497 3299  
Fax: 949 497 3299  
Mccormicklaguna@compuserve.com

## INTERNATIONAL OFFICES

### AUSTRALIA

United Electric Controls, (Aust) PTY Ltd.  
Unit 2  
615 Warrigal Rd. (Locked Bag 600)  
Ashburton, Victoria 3147, Australia  
Phone: 613-9567-0750  
Fax: 613-9567-0755

### BELGIUM

United Electric Controls, Europe  
G. Van Gervenstraat 19A  
B-9120 Beveren-Waas, Belgium  
Phone: 32-3-755 43 83  
Fax: 32-3-755 27 47

### CANADA

United Electric Controls, Canada Ltd.  
5320 Bradco Blvd. Mississauga,  
Ontario L4W 1G7, Canada  
Phone: 905-625-5082  
Fax: 905-625-5709

### GERMANY

United Electric Controls, Europe  
An Der Zentlinde 21  
D-64711 Erbach, Germany  
Phone: 49-6062-7400  
Fax: 49-6062-7501

### INDIA

United Electric Controls, India  
Amar Hill, Saki, Vihar Road  
Powai, Mumbai 400 072, India  
Phone: 91-22-857-6921  
Fax: 91-22-857-1707

### ISRAEL

Sierra Tech  
3591 Nijaro Road  
Bethlehem, PA 18020  
Phone: 610 974 8771  
Fax: 610 758 9651  
Rclc1988@aol.com

### ITALY

Nordavia  
Strada Del Cascinette 163  
Torino, Italy 10156  
Phone: 39 011 223 9839  
Fax: 39 011 223 9915

### JAPAN

Seattle Aero  
12410 S.E. 32nd Street  
Bellevue, WA 98005  
Phone: 425 643 4224  
Fax: 425 746 9517  
www.searo.com

### MALAYSIA

United Electric Controls, Far East  
No. 1-2-2, 2nd Floor  
Jalan 4/101C  
Cheras Business Centre  
Batu 5, Jalan Cheras  
56100 Kuala Lumpur, Malaysia  
Phone: 603-933 4122  
Fax: 603-933 4155

### MEXICO

United Electric Controls, Mexico  
Chihuahua 129 - 1 NTE  
Unidad Nacional 89410  
Madero, TAM, Mexico  
Phone: 52-1210-0646  
Fax: 52-1210-5761

---

Citation Excel photo courtesy of Cessna Aircraft Company.

F35C and F117 photos courtesy of Lockheed Martin Aeronautics Company.



**UNITED ELECTRIC  
CONTROLS**

Precision Sensors Division

50 Seemans Lane  
Milford, CT 06460 USA  
Telephone: 203 877 2795 Fax: 203 877 8752  
Email: sales@precisionsensors.com  
www.precisionsensors.com



BHA3.5K1201

PSG-A01