

## **CONNECTION HEAD WITH WELDED HEX FITTING**

### **How to build a part number:**

To order an Applied Sensor Technologies temperature sensor, select the requirements for the categories listed below and fill in the corresponding boxes with your selection. Don't see exactly what you need? Give us a call!

SENSOR TYPE	ASSEMBLY STYLE	SHEATH DIAMETER	SHEATH MATERIAL	TEMPERATURE RANGE	SHEATH LENGTH	OPTIONS

**SENSOR TYPE** (See page 2-5b for optional elements)

**RTP1** – Platinum; DIN 0.00385; 100 ohm +/- 0.12% @ 0°C; 3-wire construction

(For dual element, add prefix "D"- e.g., **DRTP1**)

### **ASSEMBLY STYLE**

**21** – **Sheath with head**; for use as ambient sensor or with compression fitting for process mounting. See page 2-5b for head options.

### **SHEATH DIAMETER** (in inches) (see below for restrictions)

**4** – 1/8 (0.125)

**6** – 3/16 (0.188)

**7** – 1/4 (0.250)

**9** – 3/8 (0.375)

### **SHEATH MATERIAL**

**3** – 316 stainless steel

### **TEMPERATURE RANGE** - Minimum and maximum operating temperatures

**1** – -45 to 260°C (-50 to 500°F)

**2** – -45 to 482°C (-50 to 900°F)

**3** – -45 to 788°C (-50 to 1450°F)


**4** – -200 to 260°C (-328 to 500°F)

### **SHEATH LENGTH** (for lengths greater than L=36", consult AST)

**L#** – (e.g., L6 = 6" sheath)

### **OPTIONS** – see back page

Smallest Diameter Sheath Available By Sensor Type and Temperature Range							
SINGLE							
Temp Range	RTP 1	RTP 1A	RTP 1AA	RTP 6	RTP 7	RTP 7A	RTP 7AA
1	1/8	1/8	1/8	1/8	3/16	3/16	3/16
2	3/16	3/16	3/16	3/16	3/16	3/16	3/16
3	3/16			3/16	3/16		
4	1/8			1/8	3/16		
DUAL							
Temp Range	DRTP 1	DRTP 1A	DRTP 1AA	DRTP 6	DRTP 7	DRTP 7A	DRTP 7AA
1	3/16	3/16	3/16	3/16			
2	1/4	1/4	1/4	3/16			
3	1/4			1/4			
4	3/16			3/16			

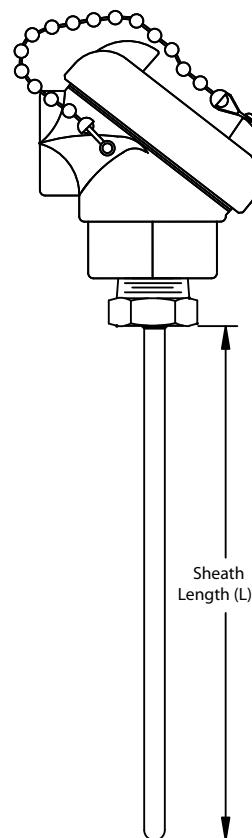

OPTIONAL ELEMENTS		
RTDs are standardly platinum, 100-ohm, DIN-curve elements with a 0.00385 alpha.		
Option Code	Accuracy (at 0°C)	Construction
RTP1 (std.)	±0.12%	3-wire
RTP1A	<b>±0.06%</b>	3-wire
RTP1AA	<b>±0.01%</b>	3-wire
RTP6	±0.12%	<b>2-wire</b>
RTP7	±0.12%	<b>4-wire</b>
RTP7A	<b>±0.06%</b>	<b>4-wire</b>
RTP7AA	<b>±0.01%</b>	<b>4-wire</b>

Notes:

1. For dual element, add prefix "D" (e.g., DRTP6)
2. Additional materials, curves and resistance values are available - see Capabilities brochure.

ASSEMBLY OPTIONS	
Option Code	Description
TAG1	Stainless steel tag and wire
B90-	90° bend in sheath [specify length from tip in inches e.g., B90-6]
B45-	45° bend in sheath (specify length from tip in inches e.g., B45-6)
CAL1	NIST traceable calibration [specify point(s)]
CRT1	Certificate of conformance
RB10	Replace terminal block with customer supplied part
RB11	Supply assembly with no terminal block inside head
WC20	Wiring cable gland for 0.187 - 0.312 diameter cables, for terminal heads with 1/2" NPT conduit connections
WC21	Wiring cable gland for 0.125 - 0.187 diameter cables, for terminal heads with 1/2" NPT conduit connections

**TRANSMITTERS** - for complete specs, see Transmitters section

TR11	4-20 mA, 2-wire, single input, isolated output; specify range, units of measure (e.g., 0-200°C) and optional head with *.
TR12	4-20 mA, 2-wire transmitter, single input, non-isolated output; specify range and units of measure (e.g., 0-200°C) and terminal head with *.
TR13	HART®/ 4-20 mA, 2-wire transmitter, single input, isolated output; specify range and units of measure (e.g., 0-200°C) and terminal head with *.

**COMPRESSION FITTINGS** (for diameters 4, 6, 7)

Option Code	NPT	Material	Ferrule
CF10	1/8"	Stainless steel	Stainless steel
CF11	1/8"	Stainless steel	Teflon®
CF12	1/8"	Brass	Brass
CF20	1/4"	Stainless steel	Stainless steel
CF21	1/4"	Stainless steel	Teflon®
CF22	1/4"	Brass	Brass
CF30	1/2"	Stainless steel	Stainless steel
CF31	1/2"	Stainless steel	Teflon®
CF32	1/2"	Brass	Brass

**WELD PADS**

Option Code	Radius To Fit Pipe
WPO0	Horizontal pad/flat
WP10	1" nominal pipe size
WP15	1.5" nominal pipe size
WP20	2" nominal pipe size
WP25	2.5" nominal pipe size
WP30	3" nominal pipe size
WP35	3.5" nominal pipe size
WP40	4" nominal pipe size

## STYLE 21

### AVAILABLE OPTIONS and MODIFICATIONS

NEMA 4 OR 4X TERMINAL HEAD OPTIONS			
Head without ground screw	Head with internal ground screw	Process Connection	Conduit Connection
Cast aluminum, screw cover with chain, NEMA 4			
HD10*	HD11*	1/2"	1/2"
Std.*	HD13*	1/2"	3/4"
Epoxy-coated aluminum, screw cover with chain, NEMA 4X			
HD50*	HD51*	1/2"	1/2"
HD52*	HD53*	1/2"	3/4"
Cast iron, screw cover with chain, NEMA 4			
HD20*	HD21*	1/2"	1/2"
HD22*	HD23*	1/2"	3/4"
316 stainless steel, screw cover with chain, NEMA 4X			
HD40*	HD41*	1/2"	3/4"
White polypropylene, screw cover with chain, NEMA 4			
HD30	N/A	1/2"	3/4"
Black polypropylene, screw cover with chain, NEMA 4			
HD31	N/A	1/2"	3/4"
Nylon, screw cover			
HD32	N/A	1/2"	1/2"
EXPLOSION-PROOF TERMINAL HEAD OPTIONS **			
Option Code	Process Connection	Conduit Connection	
Cast aluminum, screw cover with chain; o-ring gasket rated to 100°C; ceramic terminal block; FM/CSA approved for Class I Div. 1, Groups B, C, D; Class II, Groups E, F, G; internal ground screw			
HD70*	1/2"	1/2"	
HD71*	1/2"	3/4"	
Stainless steel (same specs as HD70/71)			
HD74*	1/2"	1/2"	
HD75*	1/2"	3/4"	
Epoxy-coated (same specs as HD70/71)			
HD80*	1/2"	1/2"	
HD81*	1/2"	3/4"	
Cast aluminum; ATEX approved for EEx d IIC; screw cover with chain; silicone rubber o-ring gasket; ceramic terminal block; rated for NEMA 4X, IP66 to IP68; internal and external ground screws			
HD72*	1/2"	1/2"	
HD73*	1/2"	3/4"	
Cast aluminum (formerly Style 60); screw cover; plastic terminal block; UL/CSA approved for Class I Div. 1, Groups C and D; Class II Groups E, F and G.			
HD60	1/2"	1/2"	
HD61	1/2"	3/4"	

\*can be used with transmitters

\*\*Note - assemblies using XP heads are not 3rd-party certified. Approval applies to head only.

Note: Many non-standard options, including additional sheath diameters and materials, may also be available - consult AST for specific requirements. HART® is a registered trademark of the HART Communication Foundation.