



Keeping the World Flowing
for Future Generations



Features and Benefits

- Venturi aspiration compensates for downstream pressure losses
- Optional input and output biasing allows versatility in applications
- Adjustable from 30:1 dividing ratio to 1:30 multiplying ratio assures infinite pressure adjustments
- Floating seal ring isolates control chamber which increases stability by reducing effect of high flows
- Panel or line mounting

Operating Principles

The Model 21 consists of a signal chamber lever arm, a Model 20 output valve body, and pivot assembly for lever arm adjustment. The ratio of output pressure to signal pressure is infinitely adjustable. The adjustment range permits signal amplification of 1:30 or signal reduction of 30:1 by rotation of the ratio adjustment knob.

The signal pressure acting on the signal chamber diaphragm transmits a force through a lever to the control diaphragm, thus setting output pressure. The lever fulcrum is adjustable.

Output pressure is a function of signal pressure times the ratio of lever arm lengths on either side of the fulcrum. A bias may be introduced by means of the set screws.

The Model 21D is available with both input and output adjustable bias. Maximum input bias is 3 psig, with a maximum output bias of 9 psig. The basic mathematical expression for the bias in this relay is:

$$P_o = (P_s - K1) R + K2, \text{ where}$$

P_o = Output pressure

P_s = Input signal

R = Ratio of setting

$K1$ = Input bias, (-) only

$K2$ = Output bias, (+) only

Model 21 Relay

Specifications

Flow Capacity

- 40 SCFM (68 m³/HR) 100 psig, [7.0 BAR], (700 kPa) supply, 20 psig, [1.5 BAR], (150 kPa)

Exhaust Capacity

- 5.5 SCFM (9.4 m³/HR) (downstream pressure 5 psig, [.35 BAR], (35 kPa) above set pressure)

Supply Pressure

- 250 psig, [1.7 BAR], (1700 kPa) maximum

Supply Pressure Effect

- Less than .1 psig, [.007 BAR], (.7 kPa) for 100 psig, [7.0 BAR], (700 kPa) change

Signal or Output Pressure

- 150 psig, [1.0 BAR], (1000 kPa) maximum

Ratio Range

- 30:1 through 1:30 (signal pressure: output pressure)

Operating Pressure (minimum)

- 0.5 psig, [0.03 BAR], (3.5 kPa)

Sensitivity

- 0.5" (1.27 cm) water column

Ambient Temperature Limits


- -40 to +200 °F (-40 to +93.3 °C)

Materials of Construction


- Body and Housing: Aluminum
Trim: Stainless Steel, Brass, and Zinc Plated Steel
Diaphragms: Buna N and Dacron
Lever and Fulcrum: Hardened Steel



Dimensions

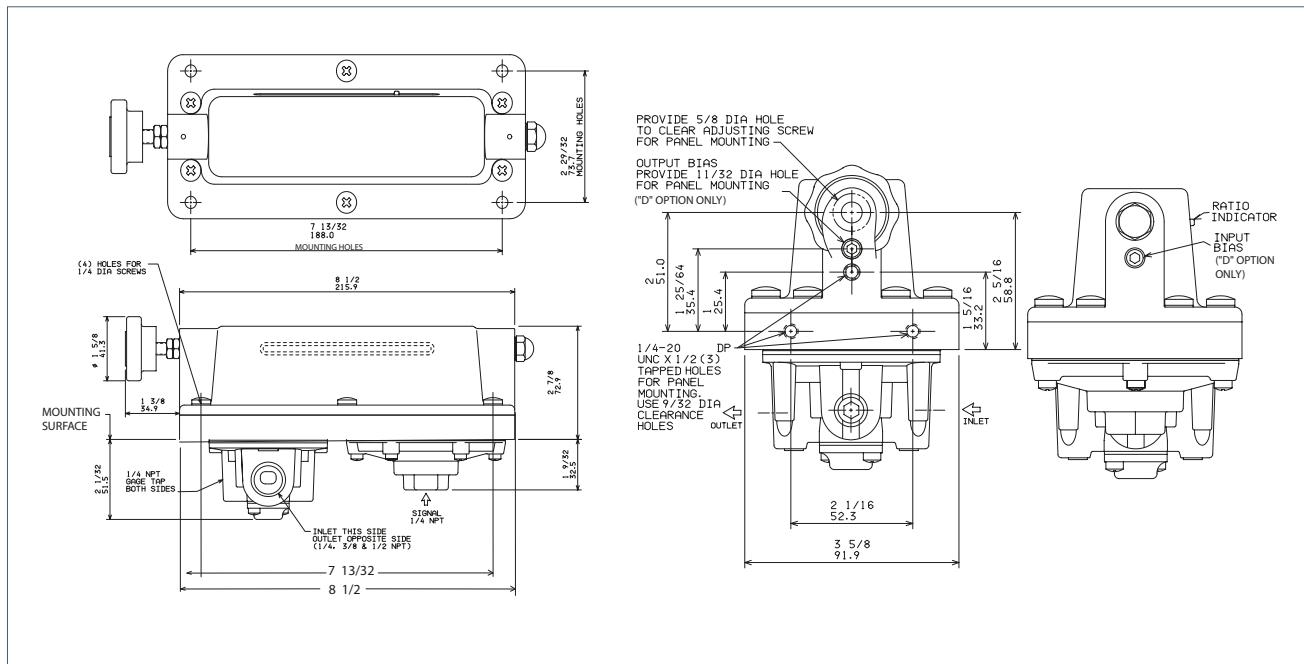

Flow Characteristics (Model 21312)

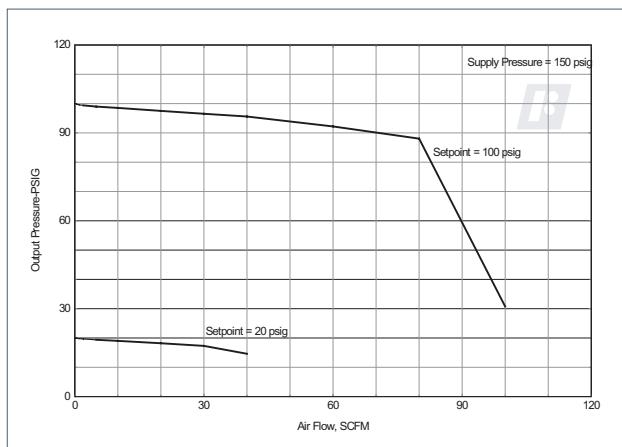

Product Code

2131 2 D

Pipe Size

2 = 1/4" NPT

3 = 3/8" NPT

Options

D = Bias¹

U = BSPT (Tapered)

¹ Maximum Input Bias: -3 psig, [-0.2 BAR], (-20 kPa),
Maximum Output Bias: 9.0 psig, [0.6 BAR], (60 kPa).

A Service Kit is available for the Model 21. Refer to the *Fairchild Model 21 Relay Installation, Operation and Maintenance Instructions*, IS-10000021.

A full listing of the Rotork sales and service network is available on our website.

www.rotork.com

PUB103-066-00
Issue 09/20

Rotork plc, Bath, UK
tel +44 (0)1225 733200
email mail@rotork.com

Fairchild Industrial Products
3920 West Point Blvd
Winston-Salem, NC 27103
tel +1 (336) 659-3400
fax +1 (336) 659-9323
email: US-WS-CS@Rotork.com

rotork®

Electric Actuators and Control Systems
Fluid Power Actuators and Control Systems
Gearboxes and Gear Operators
Precision Control and Indication
Projects, Services and Retrofit

As part of a process of on-going product development, Rotork reserves the right to amend and change specifications without prior notice. Published data may be subject to change. For the very latest version release, visit our website at www.rotork.com

The name Rotork is a registered trademark. Rotork recognises all registered trademarks. Published and produced in the UK by Rotork. POWTG0920