



Precision Control High Pressure Regulators

Rotork Fairchild's HPD, DHP, and HPP regulators eliminate leakage and provide superior life for high accuracy control of supply pressures up to 6,000 psi.

Using Inconel diaphragms in the HPP and DHP and stainless steel pistons in the HPD, they reliably regulate gas or liquid pressures down as low as 0-25 psi output or up to 0-3,000 psi in the HPP. Constructed with 316 stainless steel bodies, the HPD, DHP, and HPP ranges feature patent pending improved valve seat sealing that eliminates the risk of media leakage often associated with conventional high pressure regulators.

A variety of seat materials (see chart on page 2) permit high pressure and/or high temperature operation with two flow rates available.

HPD and DHP Style Regulators

These models feature standard Inconel diaphragms to eliminate drift and provide long term accuracy and stability.

The HPD is available in standard, tamper proof or panel mount knob configurations and the DHP is a dome loaded regulator. With 2 or 4 ports and standard NPT, BSPT or SAE style port threads, five available output ranges allow selection from 0-25 psi to 0-500 psi.



HPD Regulator

- Diaphragm operated regulator
- 316 stainless steel body and Inconel diaphragms
- 6,000 psi supply
- Five ranges up to 500 psi (35 bar)
- -40 to +500 °F (-40 to +260 °C)



HPD Regulator

- Dome loaded diaphragm operated regulator
- 316 stainless steel body and Inconel diaphragms
- 6,000 psi supply
- Five ranges up to 500 psi (35 bar)
- -40 to +500 °F (-40 to +260 °C)



HP High Pressure Regulators

Engineered for Precision Control in High Pressure Applications

HPP Regulators

Using a high pressure piston rather than diaphragm, the HPP series has similar configurations as HPD but is designed for much higher output pressures.

Three available ranges regulate to 3,000 psi output pressure. Note: the supply pressure must always be higher than the desired output pressure.



HPP Regulator

- Piston operated regulator
- All 316 stainless steel
- 6,000 psi supply
- Three ranges up to 3,000 psi (200 bar)
- -40 to +500 °F (-40 to +260 °C)

Redefining Flow Control

Ordering Information

Catalog Number HPD

Flow Capacity:

Cv 0.06

Cv 0.25

Pressure Ranges:

0-25 psi

0-50 psi

1-100 psi

2-250 psi

5-500 psi

Inlet/Outlet Port Size:

1/4"

Port Thread:

NPTF

BSPT

SAE AS5202-4

Port Configuration:

2 Port (1 Inlet, 1 Outlet)

4 Port (2 Inlets, 2 Outlets)

Body Material:

316 Stainless Steel

Seat Material:

PEEK

CTFE

Vespel

Actuator:

Knob

Tamper Proof

Relief:

Relieving


Non Relieving*

Mounting:

None

Panel

*Bubble Tight Shutoff in Most Conditions

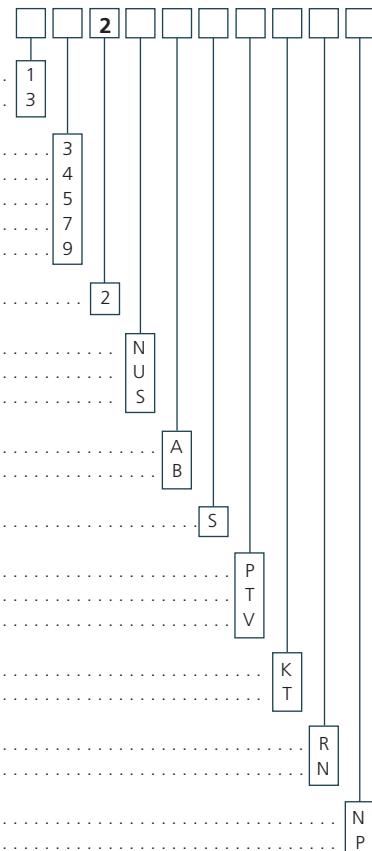

Catalog Number DHP

Flow Capacity:

Cv 0.06

Cv 0.25

Pressure Ranges:

PSIG BAR

0-25 0-1.7

0-50 0-3.5

1-100 0.07-7.0

2-250 0.15-17.0

5-500 0.365-35.0

Inlet/Outlet Port Size:

1/4"

Port Thread:

NPTF

BSPT

SAE AS5202-4

Port Configuration:

2 Port (1 Inlet, 1 Outlet)

4 Port (2 Inlets, 2 Outlets)

Body Material:

316 Stainless Steel

Brass

Seat Material:

PSIG BAR

PEEK 6000 414

CTFE 3500 230

Vespel 6000 414

*Bubble Tight Shutoff in Most Conditions

Catalog Number HPP

Flow Capacity:

Cv 0.06

Cv 0.25

Pressure Ranges:

0-1000 psi

0-2000 psi

0-3000 psi

Inlet/Outlet Port Size:

1/4"

Port Thread:

NPTF

BSPT

SAE AS5202-4

Port Configuration:

2 Port (1 Inlet, 1 Outlet)

4 Port (2 Inlets, 2 Outlets)

Body Material:

316 Stainless Steel

Seat Material:

PEEK

CTFE

Vespel

Actuator:

Knob

Tamper Proof

Relief:

Relieving

Non Relieving*

Mounting:

None

Panel

*Bubble Tight Shutoff in Most Conditions

Specifications

1 Supply Valve Cv 0.06

3 Supply Valve Cv 0.25

Maximum Supply Pressure

6000 psig, [414 BAR], (41400 kPa)

*Consult seat material chart for maximum pressure

Supply Pressure Effect

0.6 psig change for 100 psig change in supply pressure (HPD)

<2 psig change for 100 psig change in supply pressure (HPP)

Ambient Temperature

-40 °F to +500 °F, (-40 °C to 260 °C)

*Consult seat material chart for maximum temperature

Materials of Construction

Body and Housing Alloy 316L Stainless Steel

Valve 316L Stainless Steel

Diaphragm Alloy X-750 Inconel (HPD)

Seal Viton A (HPP)

Seat Material	Maximum Temperature*	@	Maximum Inlet Pressure
CTFE	175 °F (80 °C)	@	3,500 psig (241 bar)
PEEK	500 °F (260 °C)	@	3,500 psig (241 bar)
PEEK	175 °F (80 °C)	@	6,000 psig (414 bar)
VESPEL	500 °F (260 °C)	@	3,500 psig (241 bar)
VESPEL	175 °F (80 °C)	@	6,000 psig (414 bar)


* Temperatures in excess of 175 °F (80 °C) require a tamper-proof option.

HP High Pressure Regulators


Engineered for Precision Control in High Pressure Applications

Dimensional Data


HPD, HPP Regulators

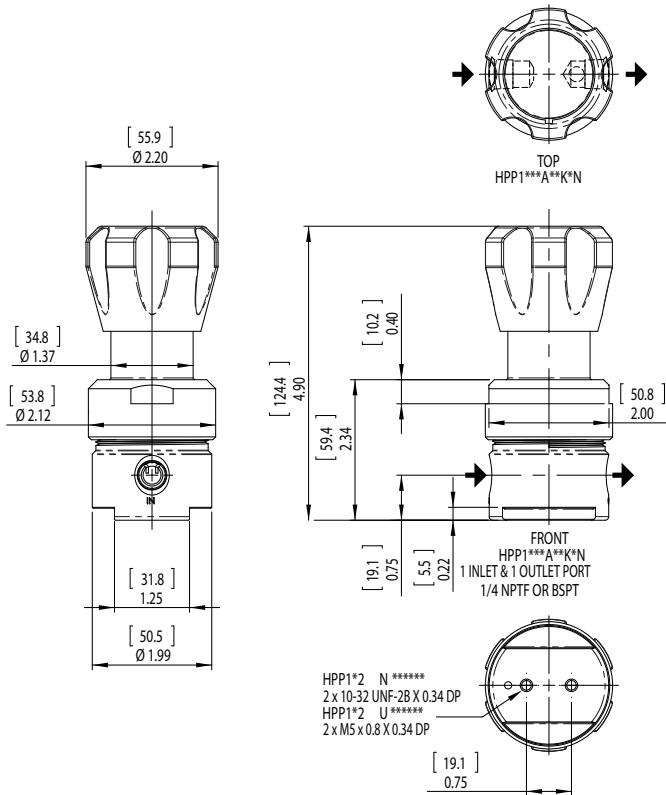


Tamper Proof Option

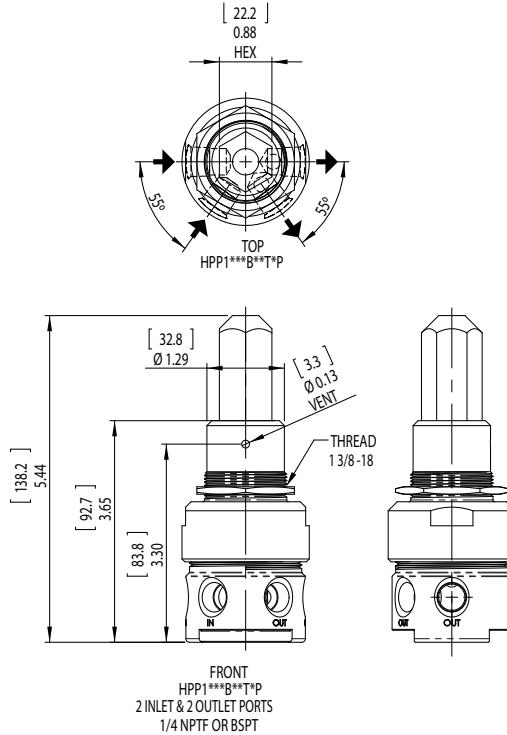

DHP Regulator

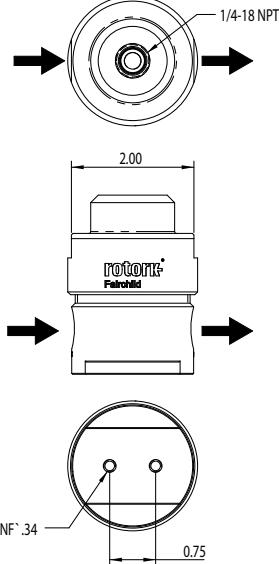

SAE Port Dimensions

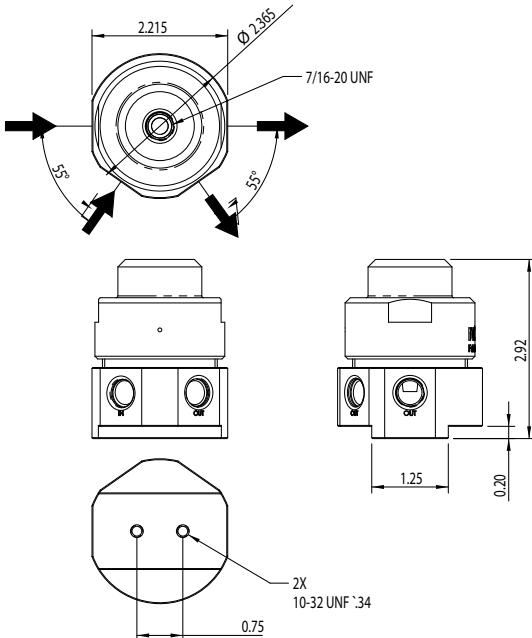



HP High Pressure Regulators

Engineered for Precision Control
in High Pressure Applications

A full listing of the Rotork sales
and service network is available
on our website.

www.rotork.com

PUB103-007-00
Issue 05/15

Formerly XXXXX. All Rotork Fluid Systems actuators are manufactured under a third party accredited ISO9001 quality assurance programme. As we are continually developing our products, their design is subject to change without notice.

The name Rotork is a registered trademark. Rotork recognises all registered trademarks. Published and produced in the UK by Rotork Fluid Systems. POWTG0615

Corporate Headquarters

Rotork plc

tel +44 (0)1225 733200

fax +44 (0)1225 333467

email mail@rotork.com

Controls

Electric Actuators and Control Systems

Fluid Systems

Fluid Power Actuators and Control Systems

Gears

Gearboxes and Gear Operators

Instruments

Precision Control and Indication

Site Services

Projects, Services and Retrofit

Scan with your smart phone
for more information.

